



## DevConnect Program

---

# Application Notes for Aiphone IX Series 2 Master Station (IX-MV7-HBT) with Avaya IP Office Server Edition - Issue 1.0

## Abstract

These Application Notes describe the configuration steps required to integrate Aiphone IX Series 2 Master Station (IX-MV7-HBT) Version 7.00 with Avaya IP Office Server Edition 11.1 and Avaya IP Office 500V2 Expansion System 11.1. Aiphone IX-MV7-HBT Master Station, which is part of the Aiphone IX Series 2 Video Door Stations, was used for the compliance test. Aiphone IX-MV7-HBT Master Station registers with Avaya IP Office as a SIP endpoint.

Readers should pay attention to **Section 2**, in particular the scope of testing as outlined in **Section 2.1** as well as the observations noted in **Section 2.2**, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the Avaya DevConnect Program.

# 1. Introduction

These Application Notes describe the configuration steps required to integrate Aiphone IX Series 2 Master Station (IX-MV7-HBT) Version 7.00 with Avaya IP Office Server Edition 11.1 and Avaya IP Office 500V2 Expansion System 11.1. IX-MV7-HBT Video Master Station acts as a SIP phone when connected to Avaya Aura®. It has a built-in camera allowing for H.264 based two-way video, and a 7-inch screen. Aiphone IX-MV7-HBT Master Station registers with Avaya IP Office as a SIP endpoint.

## 2. General Test Approach and Test Results

The interoperability compliance test included feature and serviceability testing. The feature testing focused on establishing audio and video calls between Aiphone IX-MV7-HBT Master Station, Avaya SIP and H.323 telephones, Avaya Workplace Client for Windows, Avaya Vantage™ K175, and the PSTN, and exercising basic telephony features, such as hold/resume, mute/unmute, and transfer. Additional telephony features, such as 3-way conference, call forwarding and call coverage from an Avaya IP endpoint, were also verified.

The serviceability testing focused on verifying that the Aiphone IX-MV7-HBT Master Station comes back into service after re-connecting the Ethernet cable.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya recommends our customers implement Avaya solutions using appropriate security and encryption capabilities enabled by our products. The testing referenced in this DevConnect Application Note included the enablement of supported encryption capabilities in the Avaya products. Readers should consult the appropriate Avaya product documentation for further information regarding security and encryption capabilities supported by those Avaya products.

Support for these security and encryption capabilities in any non-Avaya solution component is the responsibility of each individual vendor. Readers should consult the appropriate vendor-supplied product documentation for more information regarding those products.

For the testing associated with this Application Note, the interface between Avaya systems and Aiphone IX-MV7-HBT Master Station did not include use of any specific encryption features as requested by Aiphone.

## 2.1. Interoperability Compliance Testing

Interoperability compliance testing covered the following features and functionality:

- SIP registration of IX-MV7-HBT with IP Office Server Edition and IP Office 500V2 Expansion System.
- Audio calls between IX-MV7-HBT and Avaya SIP and H.323 deskphones with Direct IP Media (Shuffling) enabled and disabled.
- Audio and video calls between IX-MV7-HBT, Workplace, and Vantage K175 with Direct IP Media (Shuffling) enabled and disabled.
- Audio calls between IX-MV7-HBT and the PSTN.
- G.711 codec support.
- UDP transport protocol.
- IX-MV7-HBT placing, answering, and terminating calls.
- Basic telephony features, including hold/resume, mute/unmute, and transfer.
- 3-way conference initiated from an Avaya IP endpoint
- Proper system recovery after re-establishing IP connectivity to IX-MV7-HBT.

## 2.2. Test Results

All test cases executed passed successfully.


## 2.3. Support

For technical support of Aiphone IX Series 2 Video Door Stations, contact Aiphone Technical Support via phone or website.

- Phone: +1 (800) 692-0200
- Web: <https://www.aiphone.com/support/technical-support>

### 3. Reference Configuration

**Figure 1** illustrates a sample configuration with an Avaya SIP-based network. Aiphone IX-MV7-HBT Master Station registered to either IP Office Server Edition or IP Office 500 V2 Expansion System (not simultaneously).

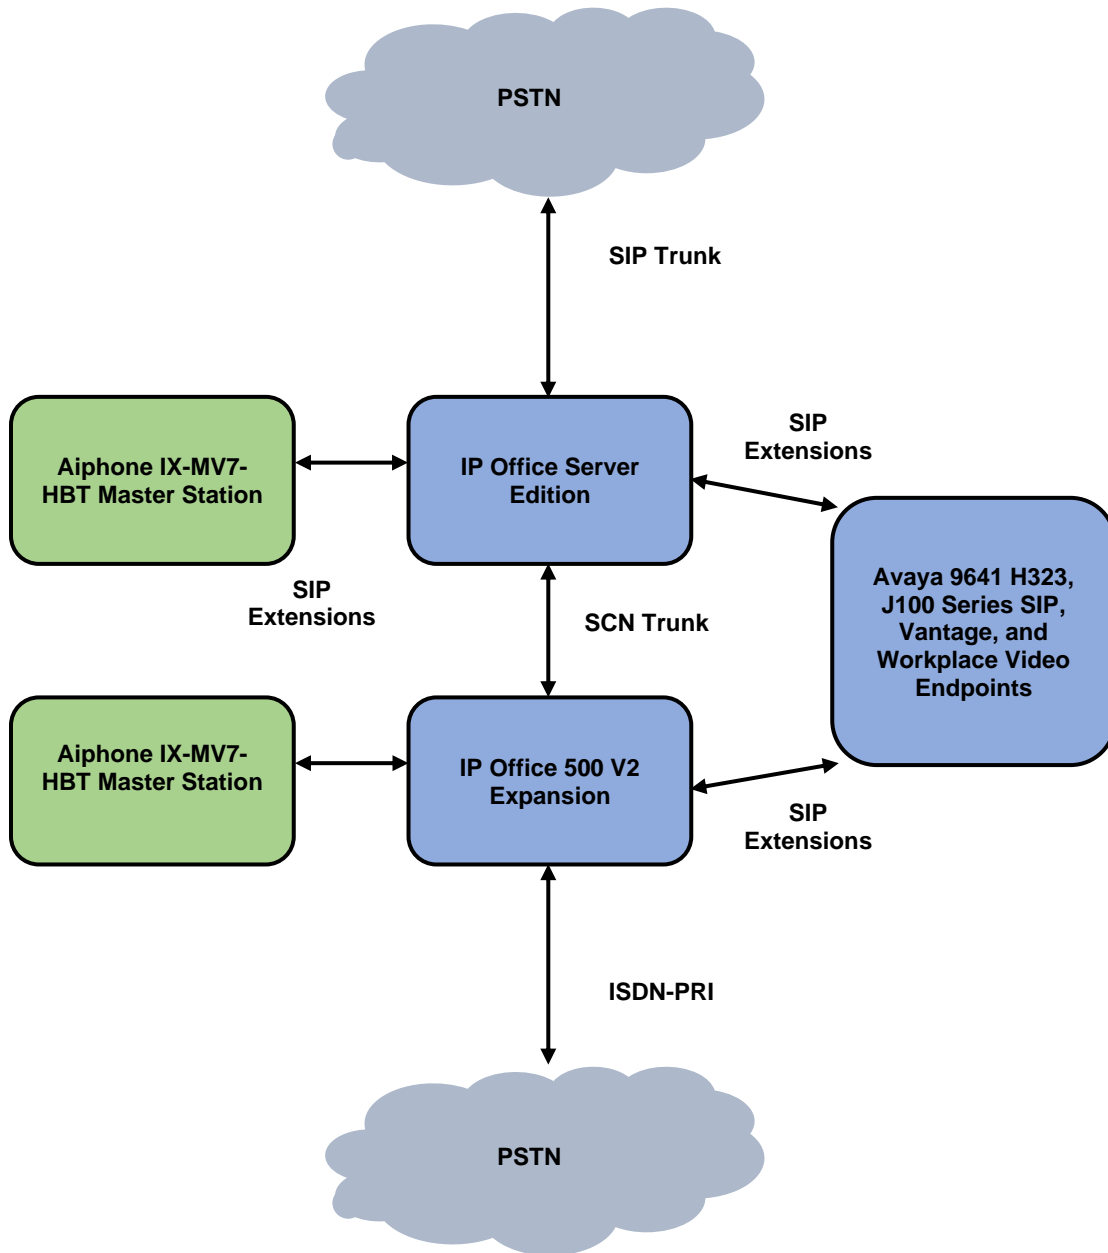

**Figure 1: Avaya SIP Telephony Network with Aiphone IX-MV7-HBT Master Station**

## 4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided:

<b>Equipment/Software</b>	<b>Release/Version</b>
Avaya IP Office Server Edition	11.1.2.4.0 build 18 (FP2 SP4)
Avaya IP Office 500V2 Expansion System	11.1.2.4.0 build 18 (FP2 SP4)
Avaya 96x1 Series IP Deskphones	6.8.5.2.3 (H.323)
Avaya J100 Series IP Phones	4.0.10.3.2 (SIP)
Avaya K175 Vantage Device	3.1.1.2 (bld version 0012)
Avaya Workplace	3.32.0.75
Aiphone IX-MV7-HBT Master Station	7.00

**Note:** Compliance Testing is applicable when the tested solution is deployed with a standalone IP Office 500 V2 and when deployed with IP Office Server Edition in all configurations.

## 5. Configure Avaya IP Office Server Edition


This section provides the procedures for configuring Avaya IP Office Server Edition. The procedures include the following areas:

- Obtain LAN IP Address
- Administer SIP Registrar
- Administer SIP Extension for IX-MV7-HBT
- Administer SIP User for IX-MV7-HBT

**Note:** This section covers the configuration of Avaya IP Office Server Edition, but the configuration is the same for Avaya IP Office 500 V2 Expansion System.


### 5.1. Obtain LAN IP Address

From a PC running the IP Office Manager application, on the configuration tree in the left pane, select **System** to display the **System** screen for the IP Office Server Edition in the right pane. Select the **LAN1** tab, followed by the **LAN Settings** sub-tab in the right pane. Make a note of the **IP Address**, which will be used later to configure IX-MV7-HBT.

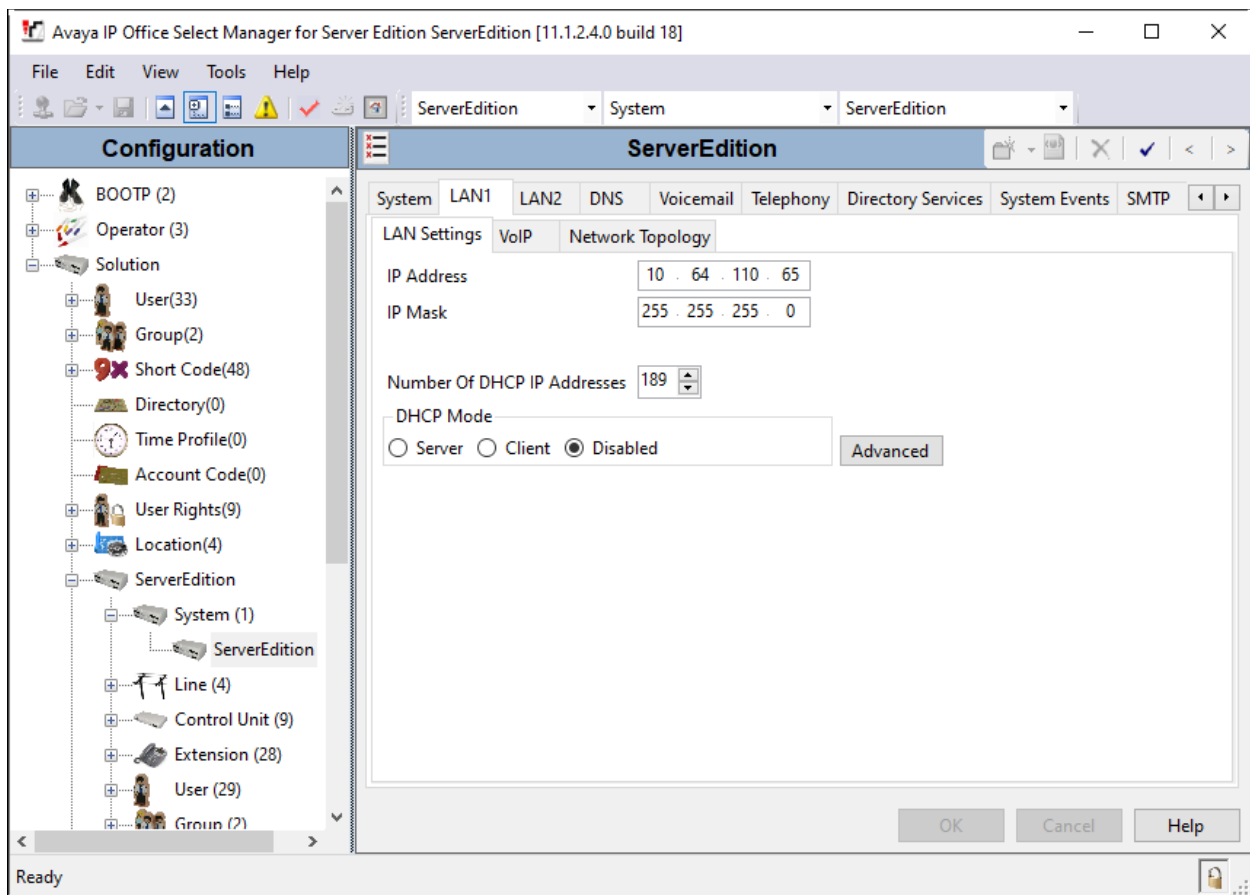


## 5.2. Administer SIP Registrar

Select the **VoIP** sub-tab. Ensure that **SIP Registrar Enable** is checked and enter a valid **SIP Domain Name**. In the compliance testing, the **SIP Domain Name** field was set to *avaya.com*. UDP transport protocol was enabled for the **Layer 4 Protocol**, which was used by IX-MV7-HBT.

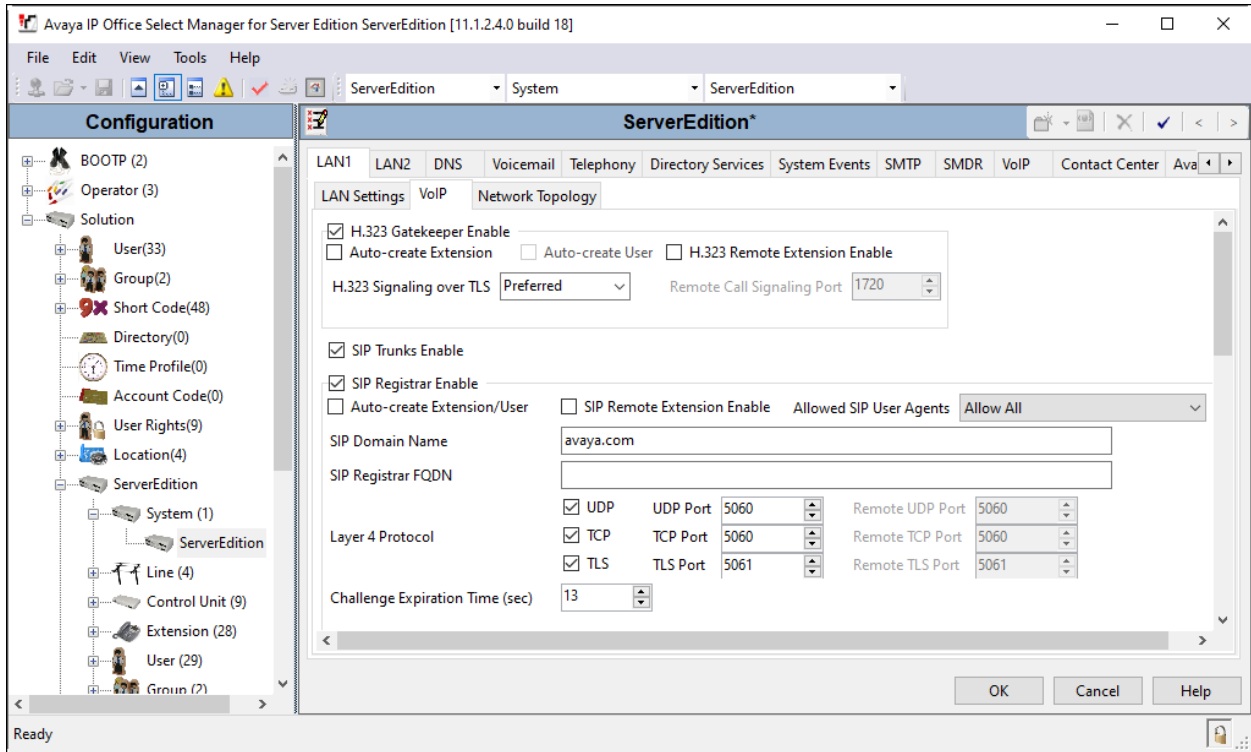


### 5.3. Administer SIP Extension for IX-MV7-HBT

From the configuration tree in the left pane, right-click on **Extension** and select **New → SIP** from the pop-up list to add a new SIP extension. Enter the desired extension for the **Base Extension** field as shown below. In this example, IX-MV7-HBT was assigned extension 72009. This is the extension that IX-MV7-HBT will use to register with IP Office Server Edition.

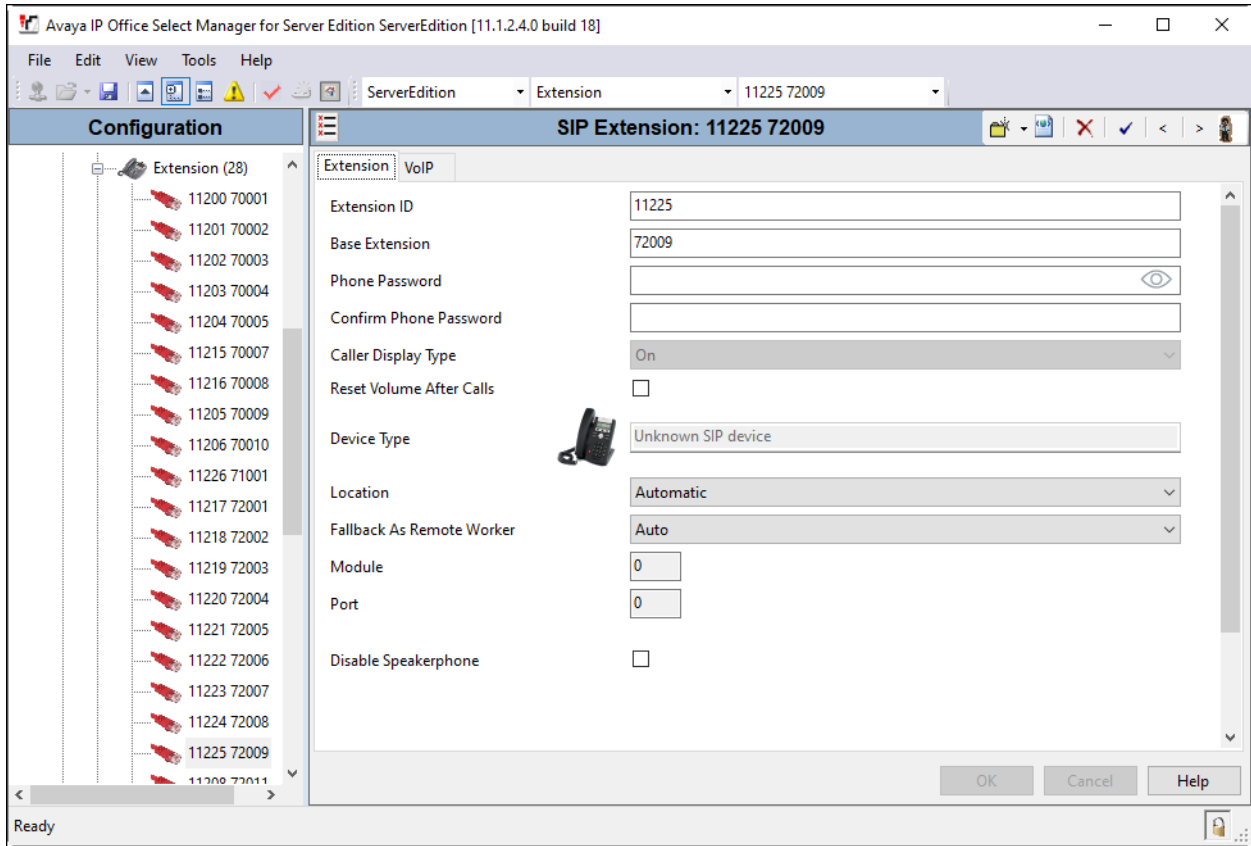



Select the **VoIP** tab and retain the default values. During the compliance test, IX-MV7-HBT was tested with *G.711 ULaw* codec. Enable **Allow Direct Media Path** so that audio/RTP flows directly between two SIP endpoints without using media resources in Avaya IP Office Server Edition. **Media Security** was *disabled* for IX-MV7-HBT.

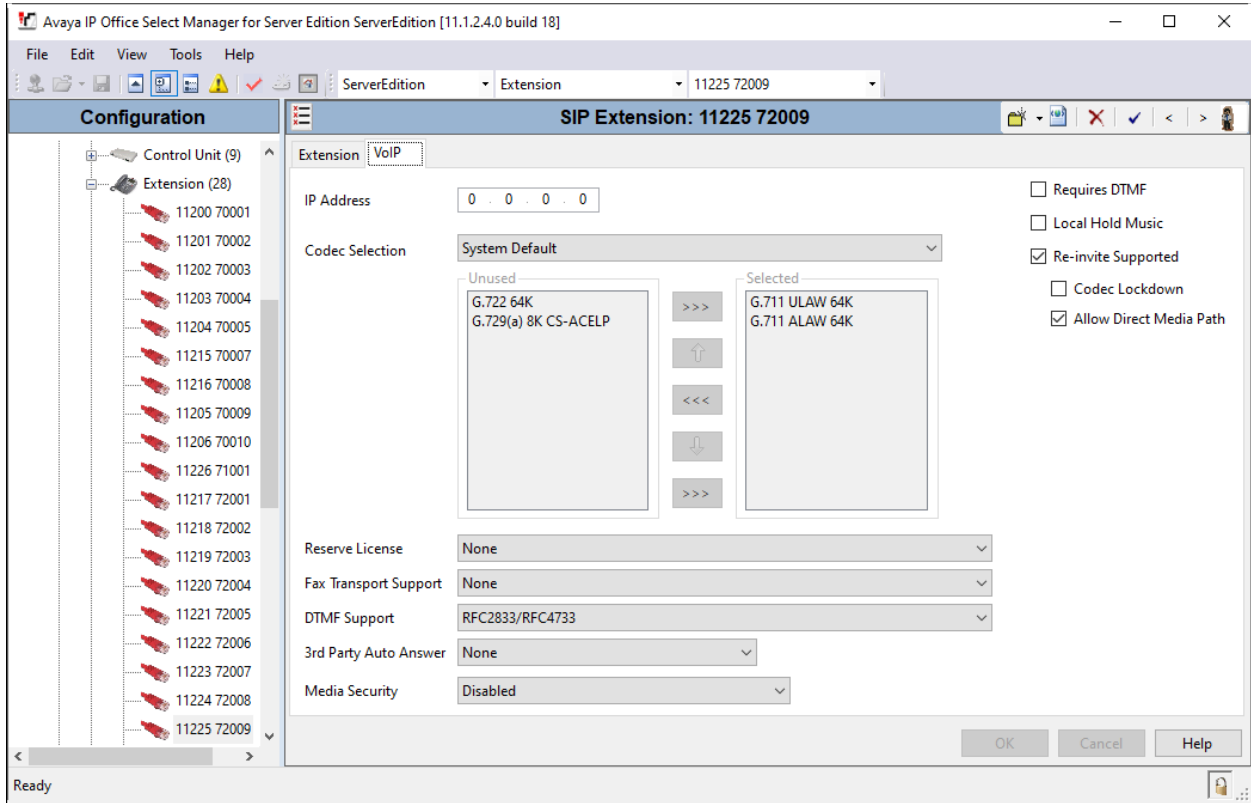


## 5.4. Administer SIP User for IX-MV7-HBT


From the configuration tree in the left pane, right-click on **User** and select **New** from the pop-up list. Enter desired values for the **Name** and **Full Name** fields. For the **Extension** field, enter the SIP extension from **Section 5.3** (e.g., 72009).

The screenshot displays the Avaya IP Office Select Manager interface. The left pane shows a configuration tree with 'User' selected under 'ServerEdition'. The right pane shows the configuration form for a new user named 'IX-MV7-HBT' with extension '72009'. The form includes fields for Name, Password, Confirm Password, Unique Identity, Conference PIN, Confirm Audio Conference PIN, Account Status (set to 'Enabled'), Full Name (set to 'IX-MV7-HBT Aiphone'), Extension (set to '72009'), Email Address, Locale, Priority (set to '5'), System Phone Rights (set to 'None'), Profile (set to 'Basic User'), and Device Type (set to 'Unknown SIP device'). There are also several checkboxes for optional features like Receptionist, Softphone, and Remote Worker, all of which are currently unchecked. The bottom of the window shows 'Ready' and standard window controls.


Select the **Voicemail** tab and disable voicemail for IX-MV7-HBT.

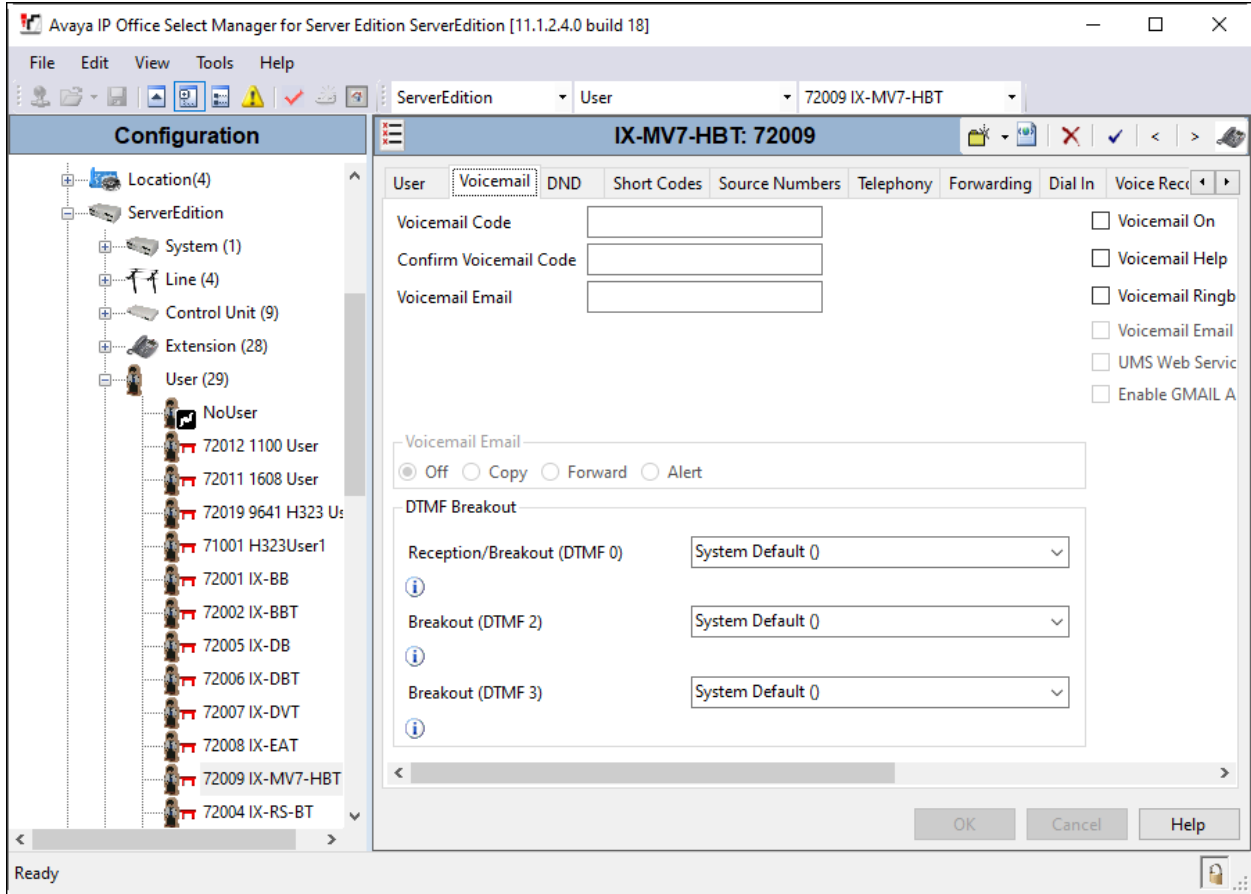

Select the **Telephony** tab followed by the **Call Settings** sub-tab. Note the settings below for the user.

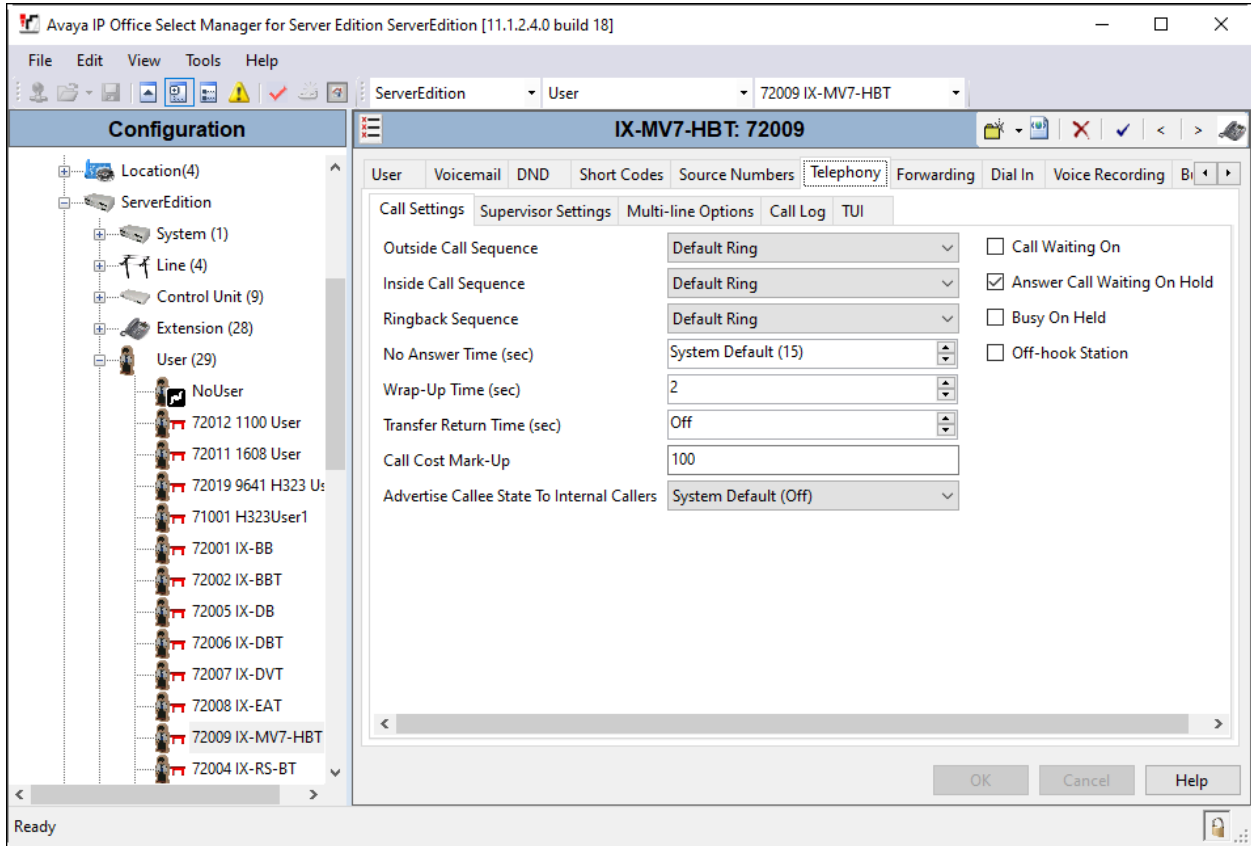

Select the **Supervisor Settings** sub-tab and enter a desired **Login Code**. The **Login Code** is the password that will be used by IX-MV7-HBT to register with IP Office Server Edition.

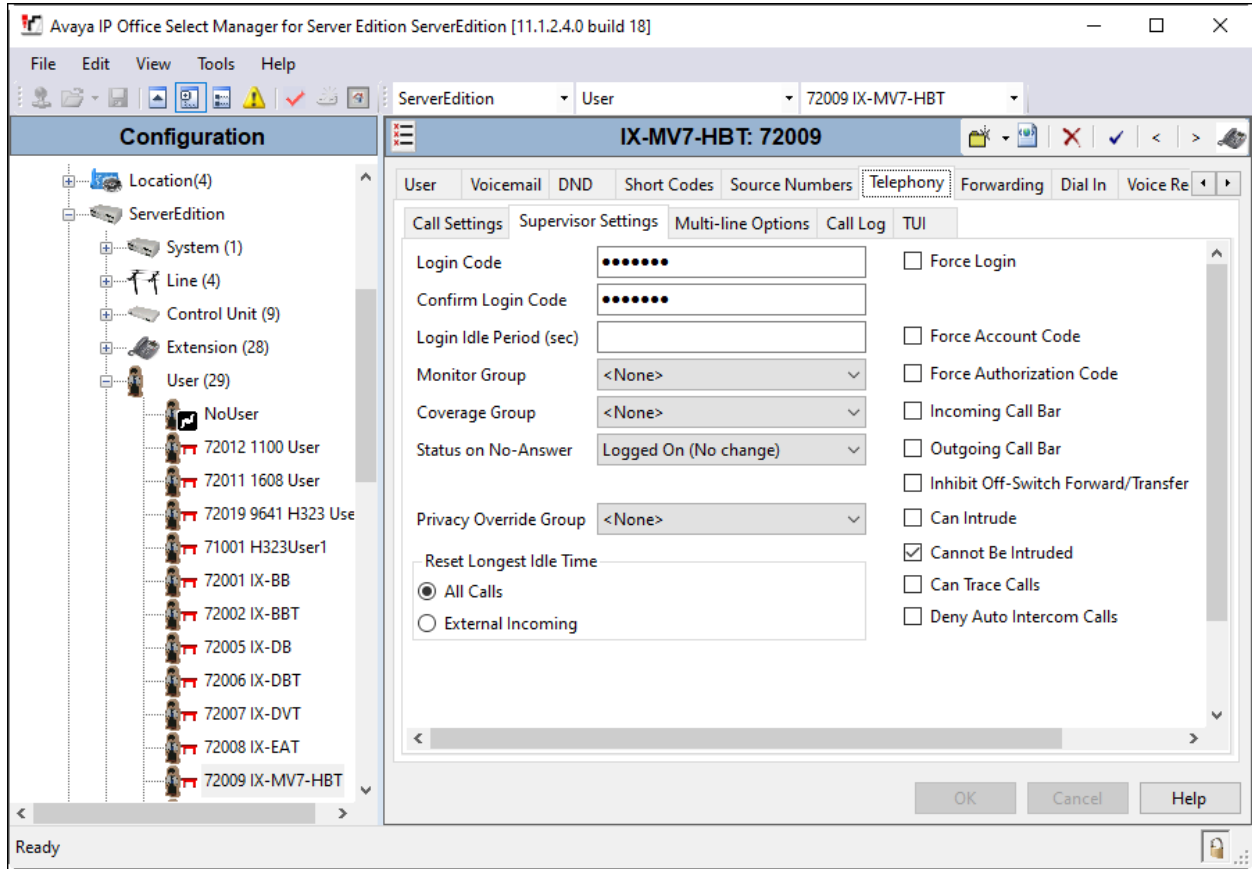


## 6. Configure Aiphone IX-MV7-HBT Master Station

This section provides the procedure for configuring IX-MV7-HBT to provide SIP connectivity to IP Office. Configuration of IX-MV7-HBT is performed via Aiphone IX System web interface. The following configuration is covered:

- Log into Aiphone IX System Web Interface
- Administer Station Information
- Administer SIP Parameters
- Administer Video SIP Channel
- Administer Audio Settings

### 6.1. Log into Aiphone IX System Web Interface

Access the Aiphone IX System Web Interface by using the URL <https://<ip-address>/webset.cgi?login> in an Internet browser, where <ip-address> is the IX-MV7-HBT IP address. Select language (not shown) and log in using the appropriate credentials.

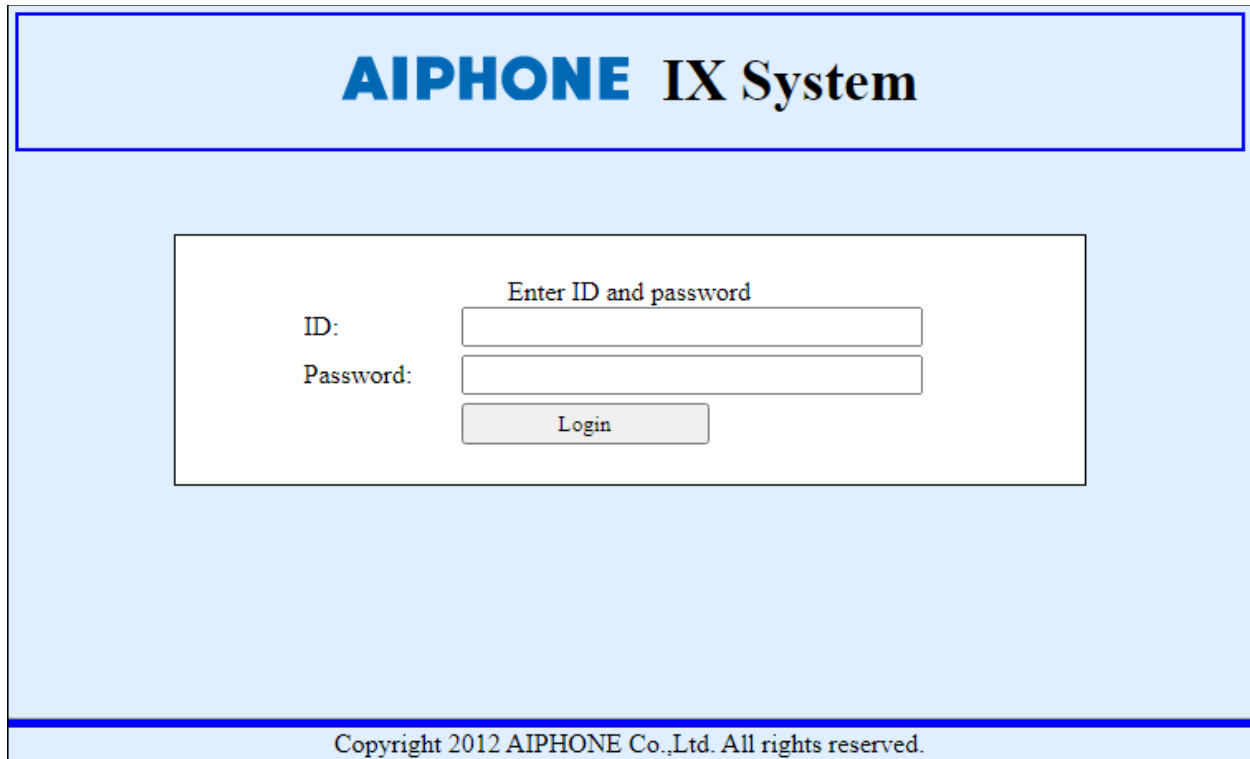

**AIPHONE IX System**

Enter ID and password

ID:

Password:

Login

Copyright 2012 AIPHONE Co.,Ltd. All rights reserved.

## 6.2. Administer Station Information

Navigate to **Station Information** → **Identification** and set the **Number** to the IX-MV7-HBT SIP extension (e.g., 72009). Input an appropriate **Name**.

The screenshot shows the AIPHONE IX System Setting web interface. The page title is "AIPHONE IX System Setting" with an "Update" button in the top right. The breadcrumb path is "Category: Master Stations" > "Station Type: IX-MV7-T". The main content area is titled "Station Information" and has a sub-tab "Identification". The form contains the following fields:

Number	<input type="text" value="72009"/>	3-5 digits
Name	<input type="text" value="IX-MV7-HBT"/>	1-24 alphanumeric characters(*1)
Location	<input type="text"/>	1-24 alphanumeric characters(*1)

(\*1)Certain characters may not be displayed correctly on IX-MV, IX

### 6.3. Administer SIP Parameters

Navigate to **Network Settings** → **SIP** from the left pane and configure the following parameters:

- **SIP Signaling Port:** Set to *5060*.
- **User Agent:** Enter desired value (e.g., *IX-MV7-HBT*).
- **ID:** Set to SIP extension (e.g., *72009*) from **Section 5.3**.
- **Password:** Enter SIP password from **Section 5.4**.
- **IPv4 Address:** Set to signaling IP address of IP Office (e.g., *10.64.110.65*).
- **Port:** Set to *5060*.

Click **Update** to save changes.

The screenshot displays the 'AIPHONE IX System Setting' web interface. The top navigation bar includes 'Category: Master Stations' and 'Station Type: IX-MV7-T'. The main content area is titled 'Network Settings' and is divided into sections for 'SIP Connections' and 'SIP Server'. The 'SIP Connections' section contains fields for 'SIP Signaling Port' (set to 5060) and 'User Agent' (set to IX-MV7-HBT). The 'SIP Server' section includes a dropdown for 'SIP Compatibility Mode' (Standard Mode) and several input fields for 'Primary Server' details: 'ID' (72009), 'Password' (masked with asterisks), 'IPv4 Address' (10.64.110.65), 'IPv6 Address' (empty), and 'Port' (5060). A sidebar on the left provides navigation links for 'Station Information' and 'Network Settings'. An 'Update' button is located in the top right corner.

Section	Parameter	Value	Validation/Notes
SIP Connections	SIP Signaling Port	5060	1-65535
	User Agent	IX-MV7-HBT	1-36 alphanumeric characters
SIP Server	SIP Compatibility Mode	Standard Mode	
	Primary Server ID	72009	1-24 alphanumeric characters
	Primary Server Password	*****	1-24 alphanumeric characters
	Primary Server IPv4 Address	10.64.110.65	1.0.0.1-223.255.255.254 or hostname(1-64 alpha)
	Primary Server IPv6 Address		::FF:0-FE:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF:FF
Port	5060	1-65535	



## 6.4. Administer Video SIP Channel

Navigate to **Network Settings** → **Video** in the left pane and configure the video settings as shown below.

The screenshot displays the AIPHONE IX System Setting web interface. The top header shows 'AIPHONE IX System Setting' and an 'Update' button. Below the header, the page is titled 'Network Settings' and 'Video'. The left sidebar contains a navigation menu with 'Station Information' and 'Network Settings' sections. The main content area is titled 'SIP Channel' and contains the following configuration options:

- SIP Channel**: A red warning message states, "The 'SIP Channel' RTP End Port should be greater than 90 digits from the RTP Start Port."
- Video Streaming**:  Enable  Disable
- Frame Rate [fps]**: 15 (dropdown)
- Select Profile**: High (dropdown)
- I-picture interval**: 15 (input field) with a red warning icon and the value 1-100
- Bit Rate [kbps] [H.264/AVC]**: 1024 (dropdown)
- RTP Start Port**: 30000 (input field) with a red warning icon and the value 1-65534
- RTP End Port**: 31000 (input field) with a red warning icon and the value 1-65535

## 6.5. Administer Audio Settings


Navigate to **Network Settings** → **Audio** in the left pane and set **Audio Codec** to select *G.711 (u-law)*.

The screenshot displays the AIPHONE IX System Setting interface. The top navigation bar includes the title 'AIPHONE IX System Setting', the category 'Master Stations', the station type 'IX-MV7-T', and an 'Update' button. The left sidebar contains a tree view with categories: Station Information (Identification, ID and Password, Language, Time, Expanded System), Network Settings (IP Address, DNS, SIP, Multicast Address, Video, Audio, Packet Priority, NTP), System Information (Location Registry, Address Book, Group List), Call Settings (Called Stations (for Master), Call Origination, Incoming Call), and Option Input / Relay (Output Settings, Option Input, Relay Output). The main content area is titled 'Network Settings' and features a blue header with 'Audio' selected. Below the header, there are several red warning messages: 'The "SIP Channel" RTP End Port should be greater than 210 digits from the RTP Start Port.', 'The "ONVIF Transmit Channel" RTP End Port should be greater than 10 digits from the RTP Start Port.', 'The "ONVIF Receive Channel" RTP End Port should be greater than 10 digits from the RTP Start Port.', and 'Changing Audio Codec from G.711(μ-law) / G.711(A-law) to G.722, or from G.722 to G.711(μ-law) / G.711(A-law) will cause the station to restart after Update is clicked.' The 'Audio' section contains three radio buttons for 'G.711(μ-law)' (selected), 'G.711(A-law)', and 'G.722'. Below these are input fields for 'Audio RTP Transmission Interval [msec]' (set to 20) and 'RTP Idle Detection Time [sec]' (set to 10). A note states 'This setting is ignored when transmitting to multiple stations (paging, etc.) 10-180 sec'. The 'SIP Channel' section has 'RTP Start Port' (20000) and 'RTP End Port' (21000) fields. The 'ONVIF Transmit Channel' section has 'RTP Start Port' (24000) and 'RTP End Port' (25000) fields. The 'ONVIF Receive Channel' section has 'RTP Start Port' (22000) and 'RTP End Port' (23000) fields.

## 7. Verification Steps

This section provides the tests that can be performed to verify proper configuration of IP Office and Aiphone IX-MV7-HBT Master Station.

1. Verify that IX-MV7-HBT has successfully registered with with IP Office. Launch **IP Office System Status** and navigate to **Extensions** → **<SIP Extension>**, where **<SIP Extension>** is the IX-MV7-HBT extension. Verify that the **Current State** is *Idle* as shown below.

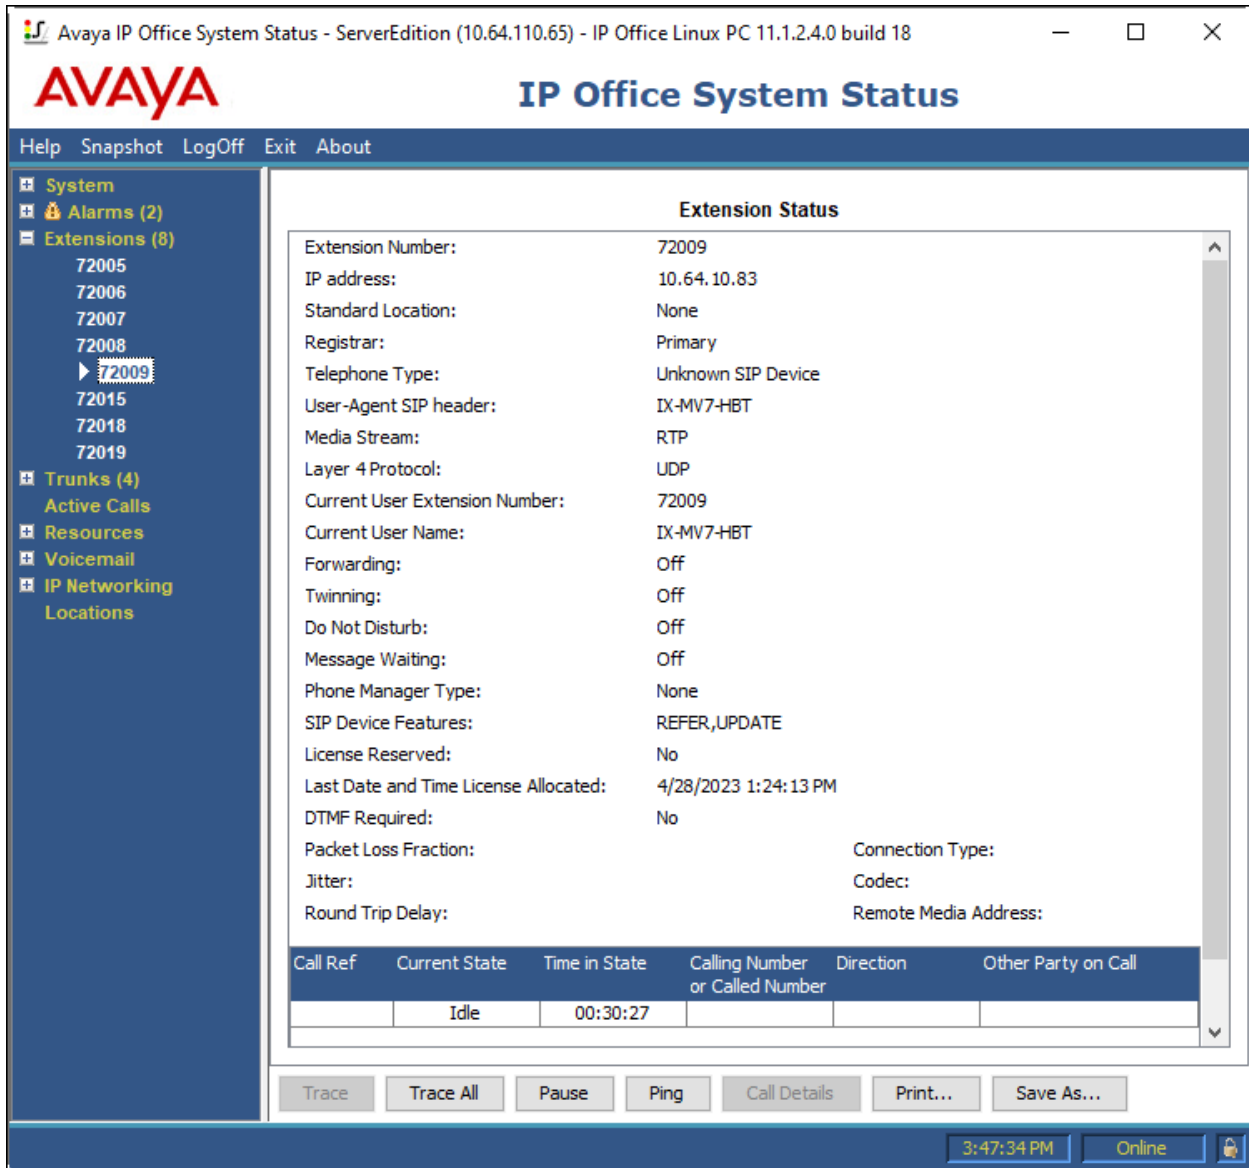

The screenshot displays the Avaya IP Office System Status application window. The title bar reads "Avaya IP Office System Status - ServerEdition (10.64.110.65) - IP Office Linux PC 11.1.2.4.0 build 18". The main window features the Avaya logo and the title "IP Office System Status". A menu bar includes "Help", "Snapshot", "LogOff", "Exit", and "About". A left-hand navigation pane lists various system components, with "Extensions (8)" expanded to show a list of extension numbers (72005, 72006, 72007, 72008, 72009, 72015, 72018, 72019). The extension 72009 is selected. The main content area displays the "Extension Status" for 72009, listing various parameters such as IP address, Registrar, Telephone Type, and Current State. At the bottom of the extension status section, a table shows call details for the selected extension.

Call Ref	Current State	Time in State	Calling Number or Called Number	Direction	Other Party on Call
	Idle	00:30:27			

Below the table, there are buttons for "Trace", "Trace All", "Pause", "Ping", "Call Details", "Print...", and "Save As...". The bottom status bar shows the time "3:47:34 PM" and the status "Online".

2. Establish inbound and outbound video calls to IX-MV7-HBT with Avaya Workplace and/or Vantage endpoints and verify two-way audio and two-way video.

## 8. Conclusion

These Application Notes describe the administration steps required to integrate Aiphone IX Series 2 Master Station (IX-MV7-HBT) with Avaya IP Office Server Edition. The Aiphone IX-MV7-HBT Master Station successfully registered with IP Office as a SIP endpoint and audio and video calls were verified. All test cases executed passed with no observations noted.

## 9. References

This section references the Avaya and Aiphone documentation relevant to these Application Notes.

Avaya product documentation is available at <https://support.avaya.com>.

[1] *Administering Avaya IP Office using Manager*, Release 11.1, available at <http://support.avaya.com> as an HTML document.

Aiphone product documentation is available at <https://www.aiphone.com>.

[2] *Aiphone IX Door Stations Web Setting Manual*, Software version 6.00 or later, available from Aiphone.

---

**©2023 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).