



IP Office Platform Guidelines Capacity

Release 11.1.3
Issue 17
February 2024

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

"Documentation" means information published in varying media which may include product information, subscription or service descriptions, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End user agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End user.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Please refer to your agreement with Avaya to establish the terms of the limited warranty. In addition, Avaya's standard warranty language as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link "Warranty & Product Lifecycle" or such successor site as designated by Avaya. Please note that if the product(s) was purchased from an authorized Avaya channel partner outside of the United States and Canada, the warranty is provided by said Avaya Channel Partner and not by Avaya.

"Hosted Service" means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE). THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/licenseinfo) UNDER THE LINK "Avaya Terms of Use for Hosted Services" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE

TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

Licenses

The Global Software License Terms ("Software License Terms") are available on the following website <https://www.avaya.com/en/legal-license-terms/> or any successor site as designated by Avaya. These Software License Terms are applicable to anyone who installs, downloads, and/or uses Software and/or Documentation. By installing, downloading or using the Software, or authorizing others to do so, the end user agrees that the Software License Terms create a binding contract between them and Avaya. In case the end user is accepting these Software License Terms on behalf of a company or other legal entity, the end user represents that it has the authority to bind such entity to these Software License Terms.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Unless otherwise stated, each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to install two Instances of the same type of products, then two products of that type must be ordered.

Third Party Components

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Service Provider

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE H.264 CODEC OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Compliance with Laws

You acknowledge and agree that it is Your responsibility to comply with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

Preventing Toll Fraud

"Toll Fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, please contact your Avaya Sales Representative.

Security Vulnerabilities

Information about Avaya's security support policies can be found in the Security Policies and Support section of <https://support.avaya.com/security>.

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (<https://support.avaya.com/css/P8/documents/100161515>).

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya LLC.

All non-Avaya trademarks are the property of their respective owners.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: <https://support.avaya.com> for Product or Cloud Service notices and articles, or to report a problem with your Avaya Product or Cloud Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <https://support.avaya.com> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Contents

| | |
|---|----|
| Chapter 1: Purpose | 7 |
| Intended Audience | 7 |
| Disclaimer | 7 |
| Information classifications and NDA requirements | 8 |
| Applicability | 8 |
| Chapter 2: Overview | 9 |
| Definitions | 10 |
| Changes from Previous Release | 10 |
| Virtualized Deployments | 10 |
| IP Office Select/IP Office Subscription | 11 |
| Subscription | 12 |
| Avaya Contact Center Applications | 12 |
| Chapter 3: Capacity Planning | 13 |
| Chapter 4: Primary and Secondary Server Capacity | 14 |
| Audio Conferencing | 14 |
| Call Capacity | 16 |
| Call Destination Server | 18 |
| Call Media Path (Linux) | 19 |
| Call Recording | 19 |
| Call Traffic Profile | 21 |
| Extension/User/Site Capacity | 23 |
| Hunt and Presence Groups | 25 |
| IP Infrastructure, Bandwidth and VoIP QoS | 26 |
| Multi-Site Network Link Capacities | 28 |
| Resilience and Failover | 29 |
| Trunk Capacity | 29 |
| Voicemail or Auto-Attendant or IVR | 31 |
| Chapter 5: one-X Portal Server | 33 |
| Chapter 6: IP500 V2/V2A Servers | 35 |
| Audio Conferencing | 35 |
| Call Capacity | 37 |
| Call Destination Server | 39 |
| Call Media Path (IP500 V2/V2A) | 39 |
| Call Recording | 40 |
| Call Traffic Profile | 42 |
| Extension/User Capacity | 44 |
| Hunt and Presence Groups | 44 |
| IP Infrastructure, Bandwidth and VoIP QoS | 45 |
| Multi-Site Network Link Capacities | 48 |

| | |
|--|-----------|
| Resilience and Failover..... | 48 |
| Small Community Network Capacity..... | 49 |
| Maximum Trunk Capacity..... | 49 |
| VCM Channel Capacity..... | 51 |
| Voicemail or Auto-Attendant or IVR..... | 53 |
| Chapter 7: Linux Expansion Server..... | 56 |
| Chapter 8: General Capacity Considerations..... | 57 |
| Account Codes..... | 58 |
| Audio Conferencing..... | 58 |
| Button Modules..... | 60 |
| Appearance Button Programming..... | 61 |
| Call Destination Server..... | 61 |
| Call Logs/Call History..... | 62 |
| Call Recording..... | 63 |
| Media Manager Recording Capacity..... | 65 |
| Call Traffic Profile..... | 66 |
| CTI & TAPI..... | 67 |
| DECT R4..... | 68 |
| Directory..... | 69 |
| Hunt and Presence Groups..... | 69 |
| Incoming Call Routes..... | 70 |
| IP Infrastructure, Bandwidth and VoIP QoS..... | 71 |
| IP Office SoftConsole..... | 73 |
| Multi-Site Network Link Capacities..... | 74 |
| Paging..... | 75 |
| Remote Support Services..... | 76 |
| Resilience and Failover..... | 76 |
| Unified Messaging Capacity..... | 77 |
| Voicemail or Auto-Attendant or IVR..... | 78 |
| WebRTC Gateway..... | 80 |
| Web Collaboration..... | 81 |
| WebLM Server..... | 81 |
| Chapter 9: Capacity Planning Beyond 3000 Users..... | 83 |
| Inter Server Edition Link..... | 85 |
| Directory..... | 85 |
| Dial plan..... | 86 |
| Outgoing Call routing..... | 86 |
| Hunt Groups..... | 86 |
| Administration..... | 87 |
| Versions or Upgrades..... | 87 |
| Chapter 10: Additional Help and Documentation..... | 88 |
| Additional Manuals and User Guides..... | 88 |
| Getting Help..... | 88 |

| | |
|--|----|
| Finding an Avaya Business Partner..... | 89 |
| Additional IP Office resources..... | 89 |
| Training..... | 90 |

Chapter 1: Purpose

The following document covers various aspects of IP Office 11.1 capacity and performance that may have an influence on the design of a specific customer's solution. This document also includes the relevant aspects of the IP Office Select and IP Office Subscription product offers and when it should be considered.

Related links

[Intended Audience](#) on page 7

[Disclaimer](#) on page 7

[Information classifications and NDA requirements](#) on page 8

[Applicability](#) on page 8

Intended Audience

This document is intended for pre-sales, solution design, installation, administration and support personnel who required knowledge of IP500 V2/V2A, IP Office Server Edition, IP Office Select and IP Office Subscription capacity and performance.

Related links

[Purpose](#) on page 7

Disclaimer

Avaya has used reasonable commercial efforts to ensure that the information provided here under is accurate at this date. Avaya may change any underlying processes, architecture, product, description or any other information described or contained in this document. Avaya disclaims any intention or obligation to update or revise the document, whether as a result of new information, future events or otherwise. This document is provided “as is,” and Avaya does not provide any warranty of any kind, express or implied.

Related links

[Purpose](#) on page 7

Information classifications and NDA requirements

Avaya provides security related information according to the following information classifications:

| Classification | Description |
|---------------------------|--|
| <i>Avaya Restricted</i> | This classification is for extremely sensitive business information, intended strictly for use within Avaya. Unauthorized disclosure of this information can have a severe adverse impact on Avaya and the customers, the Business Partners, and the suppliers of Avaya. |
| <i>Avaya Confidential</i> | This classification applies to less sensitive business information intended for use within Avaya. Unauthorized disclosure of this information can have significant adverse impact on Avaya, and the customers, the Business Partners, and the suppliers of Avaya. Information that can be private for some people is included in this classification. |
| <i>Avaya Proprietary</i> | This classification applies to all other information that does not clearly fit into the above two classifications, and is considered sensitive only outside of Avaya. While disclosure might not have a serious adverse impact on Avaya, and the customers, Business Partners, and suppliers of Avaya, this information belongs to Avaya, and unauthorized disclosure is against Avaya policy. |
| <i>Public</i> | This classification applies to information explicitly approved by Avaya management as nonsensitive information available for external release. |

As this document is generally available, the information herein is considered *Public*. This document contains references to additional information sources which may disclose both confidential and proprietary information and require a non-disclosure agreement (NDA) with Avaya.

Related links

[Purpose](#) on page 7

Applicability

The following information is applicable to IP Office Select, IP Office Server Edition, IP Office Subscription, IP500 V2/V2A and attached endpoints for IP Office Release 11.1.3.

Related links

[Purpose](#) on page 7

Chapter 2: Overview

Before proceeding with any capacity analysis or planning, the following resources should be consulted:

- The "[Avaya IP Office Solution Description](#)" gives a high level view on deployment components.
- IP Office Technical Bulletins: Bulletins announce the general availability of new releases and their content. They can be found at: <https://ipofficekb.avaya.com/bulletins>
- Virtualized Deployments: Linux-based server components are supported in a virtualized environment using VMware technologies; the performance and capacity is directly governed by static and dynamic resource assignments which are not covered here. For more information, see "[Deploying IP Office Servers as Virtual Machines](#)".
- Avaya Contact Center Applications: IP Office Server Edition supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12
- Other attached Avaya DevConnect applications: Please refer to the relevant application documentation.

The "[Avaya IP Office Solution Description](#)" provides information about solution components, their capabilities and capacities sufficient to allow a high level design. This capacity planning document should subsequently be used to qualify and refine that design.

The most complex single component to consider is generally the IP500 V2/V2A when acting as a expansion system in a Linux-based primary server network, due to its combination of VoIP, digital and analog phones/trunks, and the flexibility of constructs.

The Linux-based server components (primary, secondary Server and Linux-based expansion) are VoIP only and single construct, save for the decision whether to move the one-X Portal server from the Primary to a separate platform (an IP Office Application Server) for capacity.

Releases prior to IP Office R11.1 have differing capacities and performance limits; the corresponding release documentation should be used.

Related links

[Definitions](#) on page 10

[Changes from Previous Release](#) on page 10

[Virtualized Deployments](#) on page 10

[IP Office Select/IP Office Subscription](#) on page 11

[Subscription](#) on page 12

[Avaya Contact Center Applications](#) on page 12

Definitions

The following terms are used within this document:

| Term | Definition |
|---------------------|--|
| Linux-Based Network | This refers to a network of servers centered around a Linux-based IP Office primary server. The network can then included a Linux-based secondary server and expansion servers plus IP500 V2/V2A expansion server systems. This type of network can run in IP Office Server Edition, IP Office Select and IP Office Subscription mode. |

Related links

[Overview](#) on page 9

Changes from Previous Release

None.

Related links

[Overview](#) on page 9

Virtualized Deployments

Server Edition components are supported in a virtualized environment using VMware vSphere, Microsoft Hyper-V, Amazon AMI and Microsoft Azure. This document refers to the option as 'OVA' (Open Virtual Appliance).

In general, the OVA is regarded as equivalent to a Dell R640, noting that:

- The necessary host and Virtual Machine (VM) resources have been assigned. Hyper-V and Azure require additional resources over VMware.
- To achieve the stated capacity and performance virtual disk provisioning must be Thick Provision Eager Zeroed or equivalent – i.e. all vHDDs must be pre-provisioned and initialized during VM deployment.
- The supported maximum capacities and performance of an IP Office expansion differs from a primary or secondary regardless of the platform.
- IP Office Select operation is required as necessary, see [IP Office Select/IP Office Subscription](#) on page 11.

For further information about VM resourcing and OVA-specific planning, see ["Deploying IP Office Servers as Virtual Machines"](#).

Related links

[Overview](#) on page 9

IP Office Select/IP Office Subscription

Avaya IP Office Select is a premium IP Office Server Edition offer providing extended capacity, performance and features over basic IP Office Server Edition. The following also apply to IP Office Subscription when running on the Linux-based server platforms.

Additional Capacity

In summary, IP Office Select offers the following increased capacities. Note that the capacities are also be subject to meeting server platform requirements, refer to the individual sections on each feature.

| Feature | Capacity Change |
|---|-----------------|
| User/Extensions per server: | 1500 > 3000 |
| Users/Extensions whole solution: | 2000 > 3000 |
| Expansion systems: | 30 > 148 |
| Power User/UC clients: | 2000 > 3000 |
| Voicemail/Attendant/Recording channels: | 250 > 500 |
| Conference channels: | 256 > 512 |
| SIP trunk calls: | 512 > 1024 |
| Inter IP Office line channels: | 250 > 500 |
| Solution SoftConsole instances: | 32 > 75 |
| Button module buttons per Linux server: | 4096 > 8192 |
| Peak call Rate: | 18,000 > 20,000 |

Additional Features

IP Office Select also offers the following additional features:

- Expansion to Expansion Inter IP Office lines
- Location based phone resilience
- Expansion to Expansion phone and hunt group resilience
- VMware High Availability (HA) - Note: Not compatible with resilience features. Either VMware HA or resilience can be used but not both.
- Resilient Avaya one-X® Portal server on a second Avaya one-X® Portal server or Secondary Server

The decision to deploy IP Office Server Edition or IP Office Select should be made at the outset. However it is possible to convert a IP Office Server Edition to an IP Office Select solution at a later date without loss of configuration or data. Moving from IP Office Select to IP Office Server Edition requires complete reconfiguration.

Related links

[Overview](#) on page 9

Subscription

Avaya IP Office Subscription is an OPEX licensed offer which supports the same capacity and performance as IP Office Select. See [IP Office Select/IP Office Subscription](#) on page 11.

A stand-alone IP500 V2/V2A running IP Office Subscription has the same capacity as other IP500 V2/V2A offers. See [IP500 V2/V2A Servers](#) on page 35.

Related links

[Overview](#) on page 9

Avaya Contact Center Applications

IP Office supports Avaya Contact Center Select (ACCS). When ACCS is connected, certain aspects of IP Office Server Edition capacity and performance are determined by that application. These include:

- Maximum agents
- Supported call rate
- Maximum Recording channels
- Available capacity and performance for non-agent users
- Maximum Conference channels for recording calls

These are irrespective of the mode (IP Office Select, IP Office Server Edition or IP Office Subscription being used as the IP Office system.

Maximum conference and recording channels are covered in [Audio Conferencing](#) on page 14 and [Call Recording](#) on page 19; please refer to the relevant application documentation for all other aspects:

Related links

[Overview](#) on page 9

Chapter 3: Capacity Planning

When designing a solution using a Linux-based IP Office primary server, many aspects need to be considered for capacity. These include:

- IP Office Subscription, IP Office Select or IP Office Server Edition deployment
- Maximum extension, and user capacity required; both per server and solution
- Maximum anticipated site/node capacity
- Maximum trunk capacity
- Hunt group quantity, size and location
- The total concurrent VoIP call capacity
- Call media destination location and type; both intermediate and final
- Direct/indirect/secure VoIP media
- Conference, and recording capacity
- Multi-site Network link capacities
- Call Destination
- IP Infrastructure & VoIP QoS
- Trunk utilization and call traffic profile
- Resilience and Failover requirements
- Available licenses

All should be assessed as one factor may limit another.

- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Chapter 4: Primary and Secondary Server Capacity

The following sections cover capacity considerations specific to Linux-based primary and secondary servers

Related links

[Audio Conferencing](#) on page 14
[Call Capacity](#) on page 16
[Call Destination Server](#) on page 18
[Call Media Path \(Linux\)](#) on page 19
[Call Recording](#) on page 19
[Call Traffic Profile](#) on page 21
[Extension/User/Site Capacity](#) on page 23
[Hunt and Presence Groups](#) on page 25
[IP Infrastructure, Bandwidth and VoIP QoS](#) on page 26
[Multi-Site Network Link Capacities](#) on page 28
[Resilience and Failover](#) on page 29
[Trunk Capacity](#) on page 29
[Voicemail or Auto-Attendant or IVR](#) on page 31

Audio Conferencing

Primary/Secondary Server

Each Primary and Secondary supports a local audio conference capability with the following capacities:

| System Mode | Primary/Secondary server | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| IP Office Server Edition | Dell R240 | 128 | 128 | 414 |
| | HP DL360 | 256 | 256 | 825 |
| | Dell R640 | 256 | 256 | 1650 |

Table continues...

| System Mode | Primary/Secondary server | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|------------------------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| | OVA | 256 | 256 | 1650 |
| IP Office Select | Dell R640 | 512 | 256 | 1650 |
| IP Office Subscription | OVA | 512 | 256 | 1650 |

IP500 V2/V2A and Linux Expansion System

Each IP500 V2/V2A and Linux Expansion System supports a local audio conference capability with the following capacities:

| Expansion Platform | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------|---------------------------|-------------------------|-------------------------------------|
| Linux/OVA | 128 | 128 | 128 |
| IP500 V2/V2A | 128 | 64 | 128 |

System Conferences

System conferences use the same conference capacity as above but are subject to the following additional limits:

- **IP Office Essential Edition/Preferred Edition:** 30.
- **IP Office Server Edition/IP Office Select:** 120. System conferences are hosted by the primary server (secondary server during resilience).

Notes

- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- The figures cover both ad-hoc and meet-me conference types.
- With one-X Portal users active, a solution-wide limit of 750 conference channel participants applies, but this does not include conferences used for call recording.
- IP Office Server Edition supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
- The increased capacities for ACCS are only supported when the applications are actively connected to the host IP Office and should only be used for call recording purposes.
- No dynamic solution-wide conference allocation is supported, only static via call flows or Conference Meet Me short code Line Group ID.
- V2 Expansion conferences exist in the digital domain; hence all VoIP parties (trunk or extension) will require a VCM channel for the duration. See [VCM Channel Capacity](#) on page 51.

- Further information on conferences can be found at: <http://marketingtools.avaya.com/knowledgebase/businesspartner/ipoffice/mergedProjects/manager/frame2.html?Conferencing.Overview.html>

Which Servers Conference Resources are Used?

The location of the conference resource used when a conference is started are determined by a number of factors:

- A user performing an ad-hoc conference uses the conference resources of the server on which they are logged in.
- A meet-me conference using a user's personal meet-me bridge uses the conference resources of the server on which they are logged in.
- A meet-me conference created by Voicemail Pro call flow, or the Conference meet-me short code feature use the system on which the feature was invoked.
- To invoke a meet-me Conference using the resources of a remote system, use the Line Group ID field of the Conference Meet Me short code feature. By default this is set to 0, for local system.
- For the case where a conference is scheduled by Avaya one-X® Portal and at the scheduled time the conference dials the delegates: The conference location is the server to which the active Avaya one-X® Portal is attached.

Recording a conference requires an additional conference channel, as well as an IP Office Line (SCN trunk) channel to the recording destination (Primary or Secondary Server, alternate during fail over operation). Neither IP Office nor Voicemail Pro can automatically link or move conference locations, but existing conferences can be connected together.

When conference resources run out, attempts to record calls, join or create conferences are rejected.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Capacity

Each server type is rated to support every single extension engaged in a call providing it is direct media and regardless of security settings. If the media stream passes through the server, the capacity is reduced.

| System Mode | Primary/Secondary server | Concurrent Calls | | |
|--------------------------|--------------------------|------------------|----------------|-----------------------|
| | | Direct Media | Indirect Media | Secure Indirect Media |
| IP Office Server Edition | Dell R240 | 750 | 128 | 64 |
| | HP DL360G7 | 1500 | 256 | 128 |
| | Dell R640 | 2000 | 1024 | 512 |
| | OVA ^[1] | 2000 | 1024 | 512 |
| IP Office Select | Dell R640 | 3000 | 1024 | 512 |
| IP Office Subscription | OVA ^[1] | 3000 | 1024 | 512 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- One VoIP call is one pair of RTP or SRTP streams between IP Office and a VoIP endpoint – for example VoIP phone, VoIP trunk, IP Office line, Voicemail Pro. Note that an indirect media call via IP Office from one VoIP endpoint to another counts as two calls; one between IP Office and endpoint A and one between IP Office and endpoint B.
- Direct media is RTP/SRTP data directly between VoIP endpoints, not via IP Office. There are some IP Office networking constraints to achieve direct media. See [Call Media Path \(IP500 V2/V2A\)](#) on page 39.
- Transcoding between any codec does not reduce the server indirect media concurrent call capacity.
- Direct media with SRTP does not reduce the direct media capacity.
- One SRTP indirect media call reduces the available RTP call capacity by 2 (and vice versa).
- If SRTP transcoding is present (for example where the security parameters are mismatched between two phones), the capacity is reduced by a further 50%.
- If the server is running Voicemail Pro, one call to voicemail, attendant, recording or IVR consumes one indirect media call.
- If the server is the location for an audio conference, each member consumes one indirect media call.

Administration

Concurrent call maximum capacity can be administered via IP Office Server Edition Manager in a number ways to ensure limits are not exceeded:

- Number of Channels and Outgoing Channels setting in the **Line > VoIP tab of IP Office lines**.
- Max Calls per Channel setting in the **Line > SIP URI tab of SIP trunks**.

- Call Admission Control area of the Location settings.
- VoIP Security area of the System settings.
- Media Security area in the **Line > VoIP Settings** tab.
- Media Security area in the **Extension > VoIP** tab.

The following occurs if the maximum numbers are exceeded:

- Unless administered, IP Office does not limit the number of concurrent calls and makes a best effort to service all.
- VoIP voice quality degrades as load increases; high overload conditions cause the Server to perform poorly in general.

Related links

[Primary and Secondary Server Capacity](#) on page 14

Call Destination Server

When considering Expansion or Server planning from a media perspective it is important to note that communication with any other IP Office Server Edition component will use VoIP and hence is limited by the media, IP Office Line (SCN trunk) and VCM capacities. This includes:

- Calls to/from Primary/Secondary and other Expansions
- Call recording - one VoIP channel per recorded call. Destination is the location of the active Voicemail Pro.
- Auto Attendants/IVR - one VoIP channel per call when connected to the Auto Attendant/IVR. Destination is the location of the active Voicemail Pro.
- Conferencing when the conference focus is not the local system - one VoIP channel per local member
- Local conferences involving remote users - one VoIP channel per remote member when connected to the conference
- Voicemail leave and collect - one VoIP channel per VM caller when. Destination is the location of the active Voicemail Pro.
- Announcements - one VoIP channel per call when generating announcements. Destination is the location of the active Voicemail Pro.
- Centralized Music on Hold – one VoIP channel per central MOH source when playing to held calls. Destination is the location of the Music on Hold source.

For all VoIP connections between systems, the codec used will be according to the IP Office Line settings of those two nodes.

Consideration should also be given to intermediate destinations to ensure adequate capacity is present. For example a consultation call will open a secondary channel for the consultation whilst keeping the initial call connected.

Lastly, any call on the IP Office Line will take into consideration administered channel limits and Call Admission Control (CAC) if active. Please refer to the CAC section of the IP Office administration documentation for behaviors when CAC limits are exceeded.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Media Path (Linux)

Where calls go between VoIP endpoints (e.g. SIP trunk to H.323 extension) there are two options: Direct and indirect media. Direct media does not use the server's routing engine and hence the base capacity concurrent calls will apply.

Direct media is a configurable parameter for VoIP trunks and extensions with a default of active.

Indirect media will occur either where configured, or if direct media is not possible (even if configured). Some causes would be:

- VoIP traffic routed between the LAN1 and LAN2 interface
- Unsuccessful codec negotiation (including silence suppression, DTMF transport as well as basic codec support)
- A VoIP endpoint that does not support direct media
- Mismatch of RTP and SRTP
- Mismatched SRTP or SRTCP security settings such as no common cipher suite. These should be avoided if at all possible due to the limited indirect media SRTP capacity.
- Network Address Translation (NAT) traversal usually associated with Remote Worker phone deployments.

The above should be avoided if at all possible due to the limited indirect media capacity.

Related links

[Primary and Secondary Server Capacity](#) on page 14

Call Recording

Each Primary and Secondary supports a voice call recording capability with the following capacities:

| System Mode | Platform | Recording Channels | | |
|----------------------------|--------------------|-----------------------|----------|--------------------|
| | | Server ^[1] | Solution | Solution with ACCS |
| IP Office Server Edition | Dell R240 | 75 | 75 | 175 |
| | HP DL360 | 150 | 150 | 350 |
| | Dell R640 | 150 | 150 | 500 |
| | OVA ^[1] | 150 | 150 | 500 |
| IP Office Select | Dell R640 | 250 | 500 | 500 |
| | OVA ^[1] | 250 | 500 | 500 |
| IP500 V2 Preferred Edition | | 40 | 40 | 40 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 - Call recording uses a 3-party conference per recorded call. Note that without ACCS connected, the primary server does not have sufficient conference channels for the whole solution - other server's conference resources must be used.
 - Conference recording adds a further conference channel to an existing conference.
 - Each recording requires one licensed (and available) voicemail channel, a VCM (for the IP500 V2 Expansion) and IP Office Line (SCN trunk) channel as the recording destination is on the Primary or Secondary Server. See [VCM Channel Capacity](#) on page 51.
 - The system supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
 - The increased capacities for ACCS are only supported for call recording, and are active when the application is connected to the host IP Office.
 - The solution internal call recording capacity is fixed at 333 hours total (555 hours for IP Office Select). This is separate from the voicemail mailbox recording capacity, see [Voicemail or Auto-Attendant or IVR](#) on page 31. It is also separate from Media Manager storage capacity, see [Media Manager Recording Capacity](#) on page 65.
 - The Media Manager application supports recordings management at the maximum channel and call rate appropriate to the server platform.
 - If the dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) the maximum solution capacity is doubled to maximum of 500 channels, the per-server capacity remains unchanged.

- One active recording channel consumes one voicemail/AA channel. If the call is being recorded in two places – for example at the user and the incoming trunk – two licensed and available voicemail channels are required.
- Maximum recording call rate is 7200/9000/10000 BHCC for a primary/secondary Linux-based server, 3,600 BHCC for an Expansion. See [Call Traffic Profile](#) on page 21.

Recording call rate is further reduced for ACCS. See [Avaya Contact Center Applications](#) on page 12.

Which Servers Conference Resources are Used?

The location of conference resource used is determined by the point of recording:

- Incoming Call Route (ICR) recording is done at trunk's location
- User recording is done at user's location.
- Hunt group recording is done at the group's location.
- System recording is done at the system's location.
- Conference recording at conference location: Ad-hoc conference recording is done at the initial user's location. Meet-me conference recording can specify the location.
- Account code recording is done at the user's location.

Administration

To ensure Voicemail Pro channel capacity is available for recordings, the IP Office Server Edition Manager settings **Voicemail Channel Reservation** on the Primary and Secondary Server's **System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

- If recording channel resources run out:
 - If the recording is mandatory, busy is returned.
 - If the recording is not mandatory, further attempts to record calls or conferences are not successful, but there may still be visual recording indications.

If exceeded:

If recording storage resources run out, further attempts to record calls or conferences will not be successful and receive announcements to that effect.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Traffic Profile

General traffic engineering is outside the scope of this document, however the following IP Office Server Edition factors should be considered:

| System Mode | Platform | Maximum Call Rate (BHCC) | |
|--------------------------|--------------------------|------------------------------|------------------------------|
| | | Server | Solution |
| IP Office Server Edition | Dell R240 | 7,200 | 7,200 |
| | HP DL360G7 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| | Dell R640 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| | OVA ^[1] | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| IP Office Select | Dell R640 ^[2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| IP Office Subscription | OVA ^[1, 2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| All | Linux | 7200 | - |
| | IP500 V2/V2A Expansion | 3600 | - |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 2. These platforms (Dell R640 or OVA) only. Other servers only support the lower 18,000/9,000 call rate.
 3. Lower call rate when any Avaya one-X[®] Portal user active.
- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
 - Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - Total solution BHCC must not exceed 9,000/10,000 BHCC when Avaya one-X[®] Portal users are active
 - Continuously running at the maximum supported solution call rate when Avaya one-X[®] Portal users are active should not exceed 24 hours.
 - Avaya one-X[®] Portal users include: Web Client, Call Assistant, Outlook Integration, Lync Integration, one-X preferred Mobile Clients
 - The maximum rate for call recording and Voicemail leave combined is 7,200/9,000/10,000 BHCC.
 - The Maximum Solution Call Rate can be further reduced by the presence of Call recording, CTI or Contact Center application such as ACCS. See [Avaya Contact Center Applications](#) on page 12.
 - IP Office Subscription is an OPEX licensed offer which supports the same capacity and performance as IP Office Select (see [IP Office Select/IP Office Subscription](#) on page 11). A stand-alone IP500 V2/V2A running IP Office Subscription has the same capacity as other IP500 V2/V2A offers (see [IP500 V2/V2A Servers](#) on page 35).

The following occurs if these figures are exceeded:

If the call rate is exceeded, there may be disruption to call voice quality, recordings, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Extension/User/Site Capacity

The server platform type should be selected to support the maximum potential users/extensions/sites according to the following table.

- The extension limits shown are for 1600/9600/J100 extensions not using TLS. Each VoIP extension that uses TLS for signaling or configuration reduces the extension capacity by 2.

This table is for Linux-based IP Office systems and networks. For IP500 V2-based IP Office systems and networks, see [Small Community Network Capacity](#) on page 49.

| System Mode | Primary, Secondary server | Maximum Users, Extensions | | Maximum Expansion Systems |
|-----------------------------|------------------------------|---------------------------|----------|---------------------------------|
| | | Server | Solution | |
| IP Office Server Edition | Dell R240 | 750 | 1500 | 30 |
| | HP DL360G7 | 1500 | 2000 | 30 |
| | Dell R640 | 2000 | 2000 | 30 |
| | OVA ^[1] | 2000 | 2000 | 30 |
| IP Office Select | Dell R640 | 3000 | 3000 | 148 |
| IP Office Subscription | OVA ^[1] | 3000 | 3000 | 148 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
2. The secondary server and primary server platforms must match in terms of capacity and performance.
3. Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
4. Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
5. A mix of physical and virtualized servers is supported, providing the resources assigned to the virtual server match those of the physical server.
6. Maximum users and extensions are configuration limits as well as a currently active/registered limit.
7. Extension and user limits include potential resilience failover extensions/users and simultaneous VoIP extensions. Again these are configuration limits as well as currently active/registered limits.

8. Extension capacity support includes the system acting as DHCP and file server for the phones. 1600/9600/J100 Series phone upgrade performance is limited according to server type as follows. If upgrade performance above these figures is required, an external HTTP/S server can be used.
 - Dell R230: 100 phones per 50 minutes.
 - HP DL360G7: 200 phones per 50 minutes.
 - Dell R640: 300 phones per 50 minutes.
 - OVA: Up to 300 phones per 50 minutes.
9. The special user 'NoUser' is not counted.
10. Simultaneous user extensions are counted in the total.
11. An Avaya Workplace Client counts as one SIP extension and one CTI load. It does not use Avaya one-X® Portal capacity.
12. Avaya Communicator for Web counts as one SIP extension, one WebRTC load and one Avaya one-X® Portal client.
13. Each VoIP extension that uses TLS for signaling or configuration reduces the extension capacity by 2.
14. Maximum per server capacity of other extension types can be lower; for example DECT R4 (750 per system), 1100/1200 Series phones (1000, 500 with TLS).
15. DECT R4, D100 DECT and 1100/1200 Series phones have directory capacity limitations. See [Directory](#) on page 69.
16. Remote worker 9600 H323 extensions are supported at a lower capacity for the HP DL360G7 (maximum 256 remote workers) and R220 servers (maximum 128 remote workers). Other server and endpoint types have no such restrictions.
17. OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
18. On non-IP Office Select or IP Office Subscription systems, if the above figures are exceeded:
 - IP Office Manager will not permit more than 2000 extensions/users (whether per server and whole solution).
 - IP Office Manager will not permit more than 30 Expansions (it always reserve one system for a Secondary Server).
 - The Primary/Secondary Server will not accept phone registrations from more than the above per-server quantity of extensions; any more are rejected. This is important when considering fallback scenarios.

Related links

[Primary and Secondary Server Capacity](#) on page 14

Hunt and Presence Groups

Hunt Groups are sets of telephone users targeted by calls. Presence groups are sets of XMPP users for IM purposes. Both are viewed together for group capacity, of which there are both per-solution and per system limits:

| System Mode | Platform | Maximum Server Group size | Maximum Groups | | Total Hunt Solution Group Members |
|--------------------------|--------------|---------------------------|----------------|----------|-----------------------------------|
| | | | Server | Solution | |
| Essential Edition | IP500 V2/V2A | 384 | 200 | 300 | 3000 |
| Preferred Edition | | | | | |
| IP Office Server Edition | Linux/OVA | 750 | 300 | 300 | 3000 |
| | IP500 V2/V2A | 384 | 200 | 300 | 3000 |
| IP Office Select | Linux/OVA | 1250 | 600 | 600 | 6000 |
| IP Office Subscription | IP500 V2/V2A | 384 | 200 | 600 | 6000 |

- Maximum Solution Groups is the total number of hunt and presence groups over the whole solution.
- Maximum Server Group size is the maximum number of members in a single hunt/presence group.
- Total Solution Group Members is the total members over all hunt/presence groups.

The following occurs if these figures are exceeded:

- IP Office Manager does not permit the administration of more than 300 solution groups if the solution is not IP Office Select or IP Office Subscription.
- IP Office Manager does not permit the administration of more than 750 per group members if the solution is not IP Office Select or IP Office Subscription.
- If the number of groups or individual size is exceeded (particularly if the **Ring Mode** is **Collective** or **Collective Call Waiting**), there may be inaccurate hunt group call presentation, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

IP Infrastructure, Bandwidth and VoIP QoS

It is not within the scope of this document to cover detailed aspects of Ethernet and IP infrastructure.

- IP500 V2 supports two 10/100 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS support.
- Avaya IP Office Linux servers supports two 10/100/1000 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS and static 802.1Q VLAN support.
- Subject to IP infrastructure: All supported IP Office traffic can be routed via a single LAN interface: All supported IP Office traffic can be routed between the LAN interfaces, however this may lead to inefficiencies and limit performance for the IP500 V2 platform.

For more information on LAN interface support, see the IP Office Server Edition LAN Support chapter of ["Deploying IP Office Server Edition"](#).

Note that secure VoIP (SRTP) can increase the required bandwidth by up to 8%, see the 'VoIP Security' chapter of [Avaya IP Office™ Platform Security Guidelines](#).

In addition to the network requirements for VoIP calls, additional bandwidth should be reserved for the corresponding inter-node signaling and management paths. This should include any access via SSLVPN (IPOSS) or Remote Support Service (RSS). The following suggested minimum bandwidths should be made available for these additional paths:

| Traffic | Suggested Minimum Bandwidth | Comments |
|---|---|---|
| Inter-node Signaling/ Status | 256 kbit/s | Between Primary and each Expansion Between Primary and Secondary Between Secondary and each Expansion. Limited signaling/status directly between Expansions Bursty traffic, peaking after start-up or restoration of node to node connectivity. |
| one-X Portal CTI | 96 kbit per call (or 192 kbit/s @ 7,200 BHCC) | Between one-X Portal server location and Expansion when one-X Portal server active. |
| Web Management | 512 kbit/s | Between Web Manager PC and Primary (or Secondary under failover conditions) when a Web Management session is active |
| IP Office Server Edition Manager | 512 kbit/s | Between SE Manager PC and each node when a IP Office Server Edition Manager session is active |
| Upgrade | 512 kbit/s | Between Primary and each node when upgrade is being performed |

Table continues...

| Traffic | Suggested Minimum Bandwidth | Comments |
|--|--|---|
| Backup/Restore | 256 – 2048 kbit/s | <p>Between Backup Server and each Expansion</p> <p>Between Backup Server and Primary</p> <p>Between Backup Server and Secondary</p> <p>An IP Office Linux platform can be designated as the backup server.</p> <p>Bandwidth is only required when a backup or restore operation is active, and only between participating nodes.</p> <p>The bandwidth required depends on the backup/restore content.</p> |
| Voicemail Pro client | 512 kbit/s | Between Voicemail Pro PC and Primary (or Secondary under failover conditions) when a Voicemail Pro server management session is active |
| Voicemail Pro Server <> Voicemail Pro Server | 1024 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| | 32 kbit/s per active channel | Extra traffic between Secondary and Primary when Dual Voicemail Pro active |
| Voicemail Pro Server <> IP Office Media Manager | 32 kbit/s per active channel | Bursty SFTP traffic, between Primary and external server running IP OfficeMedia Manager. Typically IP Office Media Manager runs coresident with Voicemail Pro. For dual active Voicemail Pro, the Secondary Voicemail Pro will send all recordings to the server running IP Office Media Manager. |
| Web Collaboration Client | 128 – 256 kbit/s | Between each active Web Collaboration client and the Web Collaboration server |
| WebRTC Client | 6 – 256 kbit/s | Between each active Avaya Communicator for Web client and the WebRTC Gateway |
| one-X Server <> one-X Server | 1–500 users: 512 kbit/s 500–1500 users: 1024 kbit/s 1500–3000 users: 2048 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| SoftConsole | 64–1024 kbit/s | <p>Bursty traffic, peaking after start-up. Higher figure for maximum 3000 user deployment.</p> <p>Between each SoftConsole application and the IP Office server.</p> |
| SMDR | 1 kbit per call report (or 7.2 kbit/s @ 7,200 BHCC) | Average SMDR message size for typical call pattern |

Table continues...

| Traffic | Suggested Minimum Bandwidth | Comments |
|---------------------------------|--------------------------------|---|
| RSS to co-located server | 64 –1024 kbit/s per TCP Tunnel | Between remote client and col-located server when a remote management session is active |

- These figures are for general guidance only as they do not reflect the specific requirements for a given installation. For example management operations are typically session based; backup/restore content and frequency are administerable; many are bursty in nature and may or may not coincide with others.
- Only the major signaling and management paths are included here, further network bandwidth may be required for SSA, SysMonitor, syslog, SNMP, etc.
- An IP Office port matrix document that covers all possible IP communications should also be consulted. It is available via the Avaya Support site (<https://support.avaya.com>).
- Server internal communications do not require bandwidth assessment

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Multi-Site Network Link Capacities

A multi-site network link is the IP Office Line connection between each server (node). The links are arranged in a star topology with the Primary Server at the center, or double star when a Secondary is present.

Regardless of direct/indirect media, VCM or codec used, a further capacity consideration is the multi-site network links between all nodes. Each IP500 V2 or Linux link has a maximum capacity of 250 channels/calls (500 for IP Office Select Linux servers). The maximum total and outgoing channels are independently configurable in Manager via the **IP Office Line > VoIP Line** tab, and have a default of 128 for both.

This is per link, not a per system limit; for example a Primary or Secondary may have up to 250/500 concurrent calls to each Expansion system. Due to the star topology of IP Office Server Edition, calls between Expansion systems typically go via the Primary or Secondary and therefore these calls must also be taken into account when considering Multi-site network link capacity.

For IP Office Select/IP Office Subscription, it is possible to add IP Office lines between expansion Systems. There is a limit of one link between each pair of expansions. This link can be used to increase capacity or resilience. Calls between Expansions will go direct rather than via the Primary/Secondary.

It is not possible to add additional multi-site network links between the Primary/Secondary and Expansions – if the capacity is exhausted an additional Secondary or Expansion system should be considered.

The following occurs if the maximum numbers are exceeded:

- If the configured values are exceeded, additional outgoing calls can be routed via ARS configuration providing an alternative route exists; additional incoming calls are automatically routed, again providing an alternative route exists.
- Alternative routes only exist when a Secondary Server is present.
- If no alternative route, incoming calls remain ringing until a channel is free, outgoing calls indicate busy.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Resilience and Failover

Resilience is supported in Linux-based networks. However, the use of resilience requires consideration of various capacity issues:

- The total extensions/users on any single Primary, Secondary or Expansion must not be configured to exceed their supported limits under any circumstances.
- Primary failure when Secondary present will route all non-local Expansion calls, Voicemail leave and collect, IVR and Auto Attendants to the Secondary
- Primary failure when Secondary present will move Hunt group processing and management access to the Secondary. This will increase the management bandwidth from the Secondary to the Expansion systems.
- Users whose extension or application fails over retain their existing user profiles rights without needing or consuming an licenses on the fallback server.
- Any voicemail channel entitlements associated with the Primary, move to the Secondary on failover; no separate license provision on the fallback server is required – unless the dual active Voicemail Pro feature is enabled.

For further information, refer to the [IP Office Resilience Overview](#) manual.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Trunk Capacity

The Primary/Secondary Server supports three types of trunk/line: SIP, H323 and IP Office.

| System Mode | Primary/ Secondary server | Maximum Registered SIP Trunks | Total SIP Trunk Calls (direct/ indirect media) | Maximum IP Office (SCN) Trunks | Maximum Expansion Systems |
|-----------------------------|---------------------------------|-------------------------------------|--|--------------------------------------|---------------------------------|
| IP Office Server Edition | Dell R240 | 125 | 256/128 | 32 | 250 |
| | HP DL360G7 | 250 | 512/256 | 32 | 250 |
| | Dell R640 | 250 | 512/256 | 32 | 250 |
| | OVA ^[1] | 250 | 512/256 | 32 | 250 |
| IP Office Select | Dell R640 | 250 | 1024/512 | 150 | 500 |
| IP Office Subscription | OVA ^[1] | 250 | 1024/512 | 150 | 500 |

- Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 - Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - The Total SIP Trunk Calls figure is the maximum number of concurrent SIP trunk calls/sessions for one system. They can be distributed over one or more trunks on the same system.
 - SIP trunk concurrent call capacity is also limited by available licenses and the **SIP Line > SIP URI > Max Calls per Channel** setting and the maximum server call capacity. See [Call Capacity](#) on page 16.
 - The number of SIP trunk session licenses requested by each system is defined by the **Maximum SIP Sessions** setting on the **License > Remote Server > Reserved Licenses** tab of IP Office Server Edition Manager. One available SIP Trunk session license enables one concurrent SIP session or call.
 - The maximum number of configured URIs per SIP trunk is 150. This is not correlated with maximum SIP trunks or concurrent calls or sessions.
 - The **Maximum Calls/Sessions per SCN Trunk** figure is the maximum number of concurrent sessions supported on a single inter-node link whether **WebSocket** or **Proprietary** type. The number of concurrent sessions is controlled by the **Line > IP Office Line > Number of Channels** setting and is also limited by the maximum server call capacity
 - H323 trunks are distinct from SCN (IP Office Line), but are taken from the same capacity pool.
 - The above figures are a theoretical maximum; other factors can reduce what can be utilized on a concurrent basis:
 - Available licenses
 - Trunk configuration
 - Maximum server call capacity

- IP infrastructure

The following occurs if the maximum numbers are exceeded:

Unless administered, IP Office does not limit the number of concurrent trunk calls and makes a best effort to service all. VoIP voice quality will degrade as load increases; high overload conditions will cause the server to perform poorly in general.

Related links

[Primary and Secondary Server Capacity](#) on page 14

Voicemail or Auto-Attendant or IVR

Leaving a Voicemail for a user or hunt group will use one licensed (and available) voicemail channel and consume one from the indirect media call capacity of the Voicemail Pro server (Primary or Secondary).

If the endpoint is remote, an IP Office Line (SCN trunk) channel is used. If the source of the call is digital/analog, a VCM channel is also required.

A voicemail collect operation uses the same resources as voicemail leave. Invoking an Auto Attendant, Announcement or IVR script uses the same resources as voicemail, and is taken from the same pool of licenses and voicemail channel capacity; one active Auto Attendants/IVR/Announcement takes one channel and license.

The total solution voicemail channel capacity is determined by a number of factors:

- The number of per-server supported voicemail channels:

| Server | Maximum Voicemail Channels |
|---------------------|---|
| Dell R640/OVA | 250 |
| HP DL360 | 150 |
| Dell R230 | 75 |
| IP500 V2/V2A UCM V2 | 40 (20 when Avaya one-X® Portal is running on the module) |

- If dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) – this doubles the maximum capacity to 500 channels.
- The number of licensed voicemail channels: Each active master Voicemail Pro must have its own licenses. It inherits the other set when active as a backup.
- Call recording also uses licensed voicemail channels. One active recording channel consumes one voicemail/AA channel.

Dual Voicemail Server Operation

When the dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) and not under failover conditions, users are provided voicemail services (voicemail,

announcements, call recording, auto attendant, IVR, etc) services from one of the Voicemail Pro servers:

- All Primary users' voicemail invocations are directed to the Primary Voicemail Pro instance.
- All Secondary users' voicemail invocations are directed to the Secondary Voicemail Pro instance.
- All Expansion users' voicemail invocations are directed to the Voicemail Pro instance defined by the **System > Voicemail > Voicemail Destination** setting. This is initially selected by the Initial Configuration Utility (ICU).

Administration

To ensure Voicemail Pro channel capacity is available for voicemail, call flow and announcement operations, the IP Office Server Edition Manager settings Voicemail Channel Reservation on the Primary and **Secondary Server's System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

Mailbox capacity

The Voicemail Pro automatically creates a mailbox for each user and hunt group in the IP Office configuration. The individual capacity is fixed at 60 minutes per user or group mailbox.

If voicemail channel resources run out:

- Unanswered calls continue to alert rather than going to voicemail.
- Voicemail collect fails to connect to the voicemail.
- Calls to attendants and call-flows will continue to alert. However, text-to-speech (TTS) will not be output during call flows.
- Announcements are not played.
- Note that the TTS channel capacity is 250.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

What happens if mailbox storage resources run out?

- Voicemail leave operations will receive an announcement that the user/group's mailbox is full.
- Voicemail collect will continue to function.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Chapter 5: one-X Portal Server

The following Avaya one-X® Portal client capacity is supported with three main options:

- The Avaya one-X® Portal server running on the Primary
- Standalone server IP Office Application Server to allow increased Avaya one-X® Portal user capacity.
- Second portal server to provide geo-resilience (running on Secondary server or secondary with second standalone IP Office Application Server)

| System Mode | Platform | Maximum one-X Portal Clients | | Maximum Solution Call Rate (BHCC) |
|--------------------------|--------------------|------------------------------|-------------|-----------------------------------|
| | | Primary | Stand Alone | |
| IP Office Server Edition | Dell R240 | 375 | 750 | 7200 |
| | HP DL360G7 | 750 | 750 | 9000 |
| | Dell R640 | 750 | 750 | 9000 |
| | OVA ^[1] | 750 | 750 | 9000 |
| IP Office Select | Dell R640 | 1500 | 3000 | 10000 |
| IP Office Subscription | OVA ^[1] | 1500 | 3000 | 10000 |
| IP500 V2 | UCM V2 | - | 50 | 3600 |

- Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- If Avaya one-X® Portal server geo-resilience is required, it must be a Secondary if Primary one-X server used, or another standalone one-X server if standalone one-X server used.
- The maximum supported total solution call rate is 7,200/9,000/10,000 BHCC when Avaya one-X® Portal users are active.
- The Avaya one-X® Portal client types can be of any mix, including plugins. HTTP or HTTPS.
- Each connected Avaya one-X® Portal client counts as one load.

- An Avaya Workplace Client counts as one SIP extension and one CTI load. It does not use Avaya one-X® Portal capacity.
- Avaya Communicator for Web counts as one SIP extension, one WebRTC load and one Avaya one-X® Portal client.

Chapter 6: IP500 V2/V2A Servers

This section provides capacity notes for IP500 V2/V2A systems. That includes all modes except IP Office Basic Edition.

When designing a Server Edition/Select solution that includes an IP500 V2/V2A as an expansion System, many aspects need to be considered for capacity.

Related links

[Audio Conferencing](#) on page 14
[Call Capacity](#) on page 37
[Call Destination Server](#) on page 18
[Call Media Path \(IP500 V2/V2A\)](#) on page 39
[Call Recording](#) on page 19
[Call Traffic Profile](#) on page 21
[Extension/User Capacity](#) on page 44
[Hunt and Presence Groups](#) on page 25
[IP Infrastructure, Bandwidth and VoIP QoS](#) on page 26
[Multi-Site Network Link Capacities](#) on page 28
[Resilience and Failover](#) on page 29
[Small Community Network Capacity](#) on page 49
[Maximum Trunk Capacity](#) on page 49
[VCM Channel Capacity](#) on page 51
[Voicemail or Auto-Attendant or IVR](#) on page 31

Audio Conferencing

Primary/Secondary Server

Each Primary and Secondary supports a local audio conference capability with the following capacities:

| System Mode | Primary/Secondary server | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| IP Office Server Edition | Dell R240 | 128 | 128 | 414 |
| | HP DL360 | 256 | 256 | 825 |
| | Dell R640 | 256 | 256 | 1650 |
| | OVA | 256 | 256 | 1650 |
| IP Office Select | Dell R640 | 512 | 256 | 1650 |
| IP Office Subscription | OVA | 512 | 256 | 1650 |

IP500 V2/V2A and Linux Expansion System

Each IP500 V2/V2A and Linux Expansion System supports a local audio conference capability with the following capacities:

| Expansion Platform | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------|---------------------------|-------------------------|-------------------------------------|
| Linux/OVA | 128 | 128 | 128 |
| IP500 V2/V2A | 128 | 64 | 128 |

System Conferences

System conferences use the same conference capacity as above but are subject to the following additional limits:

- **IP Office Essential Edition/Preferred Edition:** 30.
- **IP Office Server Edition/IP Office Select:** 120. System conferences are hosted by the primary server (secondary server during resilience).

Notes

- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- The figures cover both ad-hoc and meet-me conference types.
- With one-X Portal users active, a solution-wide limit of 750 conference channel participants applies, but this does not include conferences used for call recording.
- IP Office Server Edition supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
- The increased capacities for ACCS are only supported when the applications are actively connected to the host IP Office and should only be used for call recording purposes.
- No dynamic solution-wide conference allocation is supported, only static via call flows or Conference Meet Me short code Line Group ID.

- V2 Expansion conferences exist in the digital domain; hence all VoIP parties (trunk or extension) will require a VCM channel for the duration. See [VCM Channel Capacity](#) on page 51.
- Further information on conferences can be found at: http://marketingtools.avaya.com/knowledgebase/businesspartner/ipoffice/mergedProjects/manager/_frame2.html?Conferencing.Overview.html

Which Servers Conference Resources are Used?

The location of the conference resource used when a conference is started are determined by a number of factors:

- A user performing an ad-hoc conference uses the conference resources of the server on which they are logged in.
- A meet-me conference using a user's personal meet-me bridge uses the conference resources of the server on which they are logged in.
- A meet-me conference created by Voicemail Pro call flow, or the Conference meet-me short code feature use the system on which the feature was invoked.
- To invoke a meet-me Conference using the resources of a remote system, use the Line Group ID field of the Conference Meet Me short code feature. By default this is set to 0, for local system.
- For the case where a conference is scheduled by Avaya one-X® Portal and at the scheduled time the conference dials the delegates: The conference location is the server to which the active Avaya one-X® Portal is attached.

Recording a conference requires an additional conference channel, as well as an IP Office Line (SCN trunk) channel to the recording destination (Primary or Secondary Server, alternate during fail over operation). Neither IP Office nor Voicemail Pro can automatically link or move conference locations, but existing conferences can be connected together.

When conference resources run out, attempts to record calls, join or create conferences are rejected.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Capacity

The concurrent call capacity between digital/analog extensions and/or digital/analog trunks is non-blocking. That is, all extensions and trunks can be involved in calls simultaneously. VoIP calls do not affect this capacity.

The IP500 V2/V2A Expansion has a number of concurrent VoIP call capacities that can influence the solution design:

| Parameters | | Concurrent VoIP calls | Comment |
|---------------------------|---|-----------------------|--|
| Unsecure or Secure | Direct media | 384 | Calls with direct media between VoIP endpoints/trunks. |
| Unsecure | Indirect media, IP500 V2 VCM | 120 | Calls between the VoIP and digital/analog domain. Also limited by the available VCM channel capacity (see below). |
| Unsecure or secure | Indirect media, IP500 V2 RTP relay | 120 | Calls between VoIP endpoints/trunks that cannot go direct media, but do not require a VCM. Note that a VCM channel is always required during call setup. The value is per call leg. For example 60 H.323 extensions calling 60 H.323 extensions constitutes 120 total calls. |
| Secure | Indirect media, IP500 V2 | 40 | The value is per call leg. This means 40 VCM calls or 20 indirect media calls if some SRTP settings demand decoding, then re-encoding. If a mixed RTP/SRTP call environment, each SRTP leg removes three from the RTP call capacity. |

These are not cumulative VoIP capacity figures – for example, a mixture of two call types changes the capacity to a value between the two limits. Calls that remain in the digital/analog domain do not affect this VoIP call capacity.

Administration

Concurrent call maximum capacity can be administered via IP Office Server Edition Manager in a number ways to ensure limits are not exceeded:

- **Number of Channels** and **Outgoing Channels** setting in the **Line > VoIP** tab of IP Office lines
- **Max Calls per Channel** setting in the **Line > SIP URI** tab of SIP trunks
- **Call Admission Control** area of the **Location** settings.
- **VoIP Security** area of the **System** settings.
- **Media Security** area in the **Line > VoIP Settings** tab.
- **Media Security** area in the **Extension > VoIP** tab.

The following occurs if the maximum numbers are exceeded:

Unless administered, the IP500 V2 Expansion does not limit the number of concurrent calls and makes a best effort to service all. VoIP voice quality will degrade as load increases; high overload conditions will cause the IP500 V2 Expansion to perform poorly in general.

Related links

[IP500 V2/V2A Servers](#) on page 35

Call Destination Server

When considering Expansion or Server planning from a media perspective it is important to note that communication with any other IP Office Server Edition component will use VoIP and hence is limited by the media, IP Office Line (SCN trunk) and VCM capacities. This includes:

- Calls to/from Primary/Secondary and other Expansions
- Call recording - one VoIP channel per recorded call. Destination is the location of the active Voicemail Pro.
- Auto Attendants/IVR - one VoIP channel per call when connected to the Auto Attendant/IVR. Destination is the location of the active Voicemail Pro.
- Conferencing when the conference focus is not the local system - one VoIP channel per local member
- Local conferences involving remote users - one VoIP channel per remote member when connected to the conference
- Voicemail leave and collect - one VoIP channel per VM caller when. Destination is the location of the active Voicemail Pro.
- Announcements - one VoIP channel per call when generating announcements. Destination is the location of the active Voicemail Pro.
- Centralized Music on Hold – one VoIP channel per central MOH source when playing to held calls. Destination is the location of the Music on Hold source.

For all VoIP connections between systems, the codec used will be according to the IP Office Line settings of those two nodes.

Consideration should also be given to intermediate destinations to ensure adequate capacity is present. For example a consultation call will open a secondary channel for the consultation whilst keeping the initial call connected.

Lastly, any call on the IP Office Line will take into consideration administered channel limits and Call Admission Control (CAC) if active. Please refer to the CAC section of the IP Office administration documentation for behaviors when CAC limits are exceeded.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Media Path (IP500 V2/V2A)

Where calls start and remain in the digital and/or analog domain, the IP500 V2/V2A Expansion's VCM and VoIP capacities have no effect. The base non-blocking capacity of the IP500 V2/V2A Expansion will apply.

Where calls go between VoIP and digital/analog domains within the IP500 V2/V2A Expansion, the indirect media limit of 120 concurrent calls and VCM availability will always apply.

Where calls go between VoIP domains (for example SIP trunk to H.323) there are two options: Direct and indirect media. Direct media does not use the IP500 V2 Expansion's routing engine and hence the base capacity of 384 concurrent calls will apply.

Direct media is a configurable parameter for VoIP trunks and extensions with a default of active.

Indirect media will occur either where configured, or if direct media is not possible (even if configured). Some of the reasons are:

- VoIP traffic routed between the LAN1 and LAN2 interface
- Unsuccessful codec negotiation (including silence suppression, DTMF transport as well as basic codec support)
- A VoIP endpoint that does not support direct media
- Mismatch of RTP and SRTP
- Mismatched SRTP or SRTCP security settings such as no common cipher suite. These should be avoided if at all possible due to the limited indirect media SRTP capacity.
- Network Address Translation (NAT) traversal usually associated with Remote Worker phone deployments.

Related links

[IP500 V2/V2A Servers](#) on page 35

Call Recording

Each Primary and Secondary supports a voice call recording capability with the following capacities:

| System Mode | Platform | Recording Channels | | |
|--------------------------|--------------------|-----------------------|----------|--------------------|
| | | Server ^[1] | Solution | Solution with ACCS |
| IP Office Server Edition | Dell R240 | 75 | 75 | 175 |
| | HP DL360 | 150 | 150 | 350 |
| | Dell R640 | 150 | 150 | 500 |
| | OVA ^[1] | 150 | 150 | 500 |
| IP Office Select | Dell R640 | 250 | 500 | 500 |
| | OVA ^[1] | 250 | 500 | 500 |

Table continues...

| System Mode | Platform | Recording Channels | | |
|----------------------------|----------|-----------------------|----------|--------------------|
| | | Server ^[1] | Solution | Solution with ACCS |
| IP500 V2 Preferred Edition | | 40 | 40 | 40 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 - Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 - Call recording uses a 3-party conference per recorded call. Note that without ACCS connected, the primary server does not have sufficient conference channels for the whole solution - other server's conference resources must be used.
 - Conference recording adds a further conference channel to an existing conference.
 - Each recording requires one licensed (and available) voicemail channel, a VCM (for the IP500 V2 Expansion) and IP Office Line (SCN trunk) channel as the recording destination is on the Primary or Secondary Server. See [VCM Channel Capacity](#) on page 51.
 - The system supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
 - The increased capacities for ACCS are only supported for call recording, and are active when the application is connected to the host IP Office.
 - The solution internal call recording capacity is fixed at 333 hours total (555 hours for IP Office Select). This is separate from the voicemail mailbox recording capacity, see [Voicemail or Auto-Attendant or IVR](#) on page 31. It is also separate from Media Manager storage capacity, see [Media Manager Recording Capacity](#) on page 65.
 - The Media Manager application supports recordings management at the maximum channel and call rate appropriate to the server platform.
 - If the dual Voicemail Pro feature is active IP Office Select and IP Office Subscription only) the maximum solution capacity is doubled to maximum of 500 channels, the per-server capacity remains unchanged.
 - One active recording channel consumes one voicemail/AA channel. If the call is being recorded in two places – for example at the user and the incoming trunk – two licensed and available voicemail channels are required.
 - Maximum recording call rate is 7200/9000/10000 BHCC for a primary/secondary Linux-based server, 3,600 BHCC for an Expansion. See [Call Traffic Profile](#) on page 21.

Recording call rate is further reduced for ACCS. See [Avaya Contact Center Applications](#) on page 12.

Which Servers Conference Resources are Used?

The location of conference resource used is determined by the point of recording:

- Incoming Call Route (ICR) recording is done at trunk's location
- User recording is done at user's location.
- Hunt group recording is done at the group's location.
- System recording is done at the system's location.
- Conference recording at conference location: Ad-hoc conference recording is done at the initial user's location. Meet-me conference recording can specify the location.
- Account code recording is done at the user's location.

Administration

To ensure Voicemail Pro channel capacity is available for recordings, the IP Office Server Edition Manager settings **Voicemail Channel Reservation** on the Primary and Secondary Server's **System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

- If recording channel resources run out:
 - If the recording is mandatory, busy is returned.
 - If the recording is not mandatory, further attempts to record calls or conferences are not successful, but there may still be visual recording indications.

If exceeded:

If recording storage resources run out, further attempts to record calls or conferences will not be successful and receive announcements to that effect.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Traffic Profile

General traffic engineering is outside the scope of this document, however the following IP Office Server Edition factors should be considered:

| System Mode | Platform | Maximum Call Rate (BHCC) | |
|--------------------------|------------|-----------------------------|-----------------------------|
| | | Server | Solution |
| IP Office Server Edition | Dell R240 | 7,200 | 7,200 |
| | HP DL360G7 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| | Dell R640 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |

Table continues...

| System Mode | Platform | Maximum Call Rate (BHCC) | |
|------------------------|--------------------------|------------------------------|------------------------------|
| | | Server | Solution |
| | OVA ^[1] | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| IP Office Select | Dell R640 ^[2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| IP Office Subscription | OVA ^[1, 2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| All | Linux | 7200 | - |
| | IP500 V2/V2A Expansion | 3600 | - |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 2. These platforms (Dell R640 or OVA) only. Other servers only support the lower 18,000/9,000 call rate.
 3. Lower call rate when any Avaya one-X[®] Portal user active.
- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
 - Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - Total solution BHCC must not exceed 9,000/10,000 BHCC when Avaya one-X[®] Portal users are active
 - Continuously running at the maximum supported solution call rate when Avaya one-X[®] Portal users are active should not exceed 24 hours.
 - Avaya one-X[®] Portal users include: Web Client, Call Assistant, Outlook Integration, Lync Integration, one-X preferred Mobile Clients
 - The maximum rate for call recording and Voicemail leave combined is 7,200/9,000/10,000 BHCC.
 - The Maximum Solution Call Rate can be further reduced by the presence of Call recording, CTI or Contact Center application such as ACCS. See [Avaya Contact Center Applications](#) on page 12.
 - IP Office Subscription is an OPEX licensed offer which supports the same capacity and performance as IP Office Select (see [IP Office Select/IP Office Subscription](#) on page 11). A stand-alone IP500 V2/V2A running IP Office Subscription has the same capacity as other IP500 V2/V2A offers (see [IP500 V2/V2A Servers](#) on page 35).

The following occurs if these figures are exceeded:

If the call rate is exceeded, there may be disruption to call voice quality, recordings, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Extension/User Capacity

A single IP500 V2/V2A Expansion can support 384 users and up to 384 Analog/digital/IP extensions (H.323, SIP and or DECT R4). Analog and digital extension capacity is dependent upon the hardware fitted to the system.

- Maximum users and extensions are configuration limits as well as a currently active/registered limit.
- Extension and user limits include any resilience fail-over extensions/users; again these are configuration limits as well as a currently active/registered limit.
- Extension capacity support includes IP Office acting as a server for any DHCP, upgrade and other operational files. 1600/9600/J100 phone upgrade performance is limited to 50 within 50 minutes for the same phone type.
- Upgrading more than 50 phones at a time from an IP500 V2/V2A is not recommended. If upgrade performance above these figures are required, an external HTTP/S server can be used.
- For non-subscription systems, H323, DECT R4 and SIP extension capacity is also limited by available licenses.
- 9600 H323 Remote worker extensions are supported at a lower capacity; maximum 120.
- 9600 H323 extensions with TLS are supported at a lower capacity; maximum 128. That is, each VoIP extension that uses TLS reduces the extension capacity by 3.

Related links

[IP500 V2/V2A Servers](#) on page 35

Hunt and Presence Groups

Hunt Groups are sets of telephone users targeted by calls. Presence groups are sets of XMPP users for IM purposes. Both are viewed together for group capacity, of which there are both per-solution and per system limits:

| System Mode | Platform | Maximum Server Group size | Maximum Groups | | Total Hunt Solution Group Members |
|--|--------------|---------------------------|----------------|----------|-----------------------------------|
| | | | Server | Solution | |
| Essential Edition Preferred Edition | IP500 V2/V2A | 384 | 200 | 300 | 3000 |

Table continues...

| System Mode | Platform | Maximum Server Group size | Maximum Groups | | Total Hunt Solution Group Members |
|--------------------------|--------------|---------------------------|----------------|----------|-----------------------------------|
| | | | Server | Solution | |
| IP Office Server Edition | Linux/OVA | 750 | 300 | 300 | 3000 |
| | IP500 V2/V2A | 384 | 200 | 300 | 3000 |
| IP Office Select | Linux/OVA | 1250 | 600 | 600 | 6000 |
| IP Office Subscription | IP500 V2/V2A | 384 | 200 | 600 | 6000 |

- Maximum Solution Groups is the total number of hunt and presence groups over the whole solution.
- Maximum Server Group size is the maximum number of members in a single hunt/presence group.
- Total Solution Group Members is the total members over all hunt/presence groups.

The following occurs if these figures are exceeded:

- IP Office Manager does not permit the administration of more than 300 solution groups if the solution is not IP Office Select or IP Office Subscription.
- IP Office Manager does not permit the administration of more than 750 per group members if the solution is not IP Office Select or IP Office Subscription.
- If the number of groups or individual size is exceeded (particularly if the **Ring Mode** is **Collective** or **Collective Call Waiting**), there may be inaccurate hunt group call presentation, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

IP Infrastructure, Bandwidth and VoIP QoS

It is not within the scope of this document to cover detailed aspects of Ethernet and IP infrastructure.

- IP500 V2 supports two 10/100 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS support.
- Avaya IP Office Linux servers supports two 10/100/1000 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS and static 802.1Q VLAN support.
- Subject to IP infrastructure: All supported IP Office traffic can be routed via a single LAN interface: All supported IP Office traffic can be routed between the LAN interfaces, however this may lead to inefficiencies and limit performance for the IP500 V2 platform.

For more information on LAN interface support, see the IP Office Server Edition LAN Support chapter of ["Deploying IP Office Server Edition"](#).

Note that secure VoIP (SRTP) can increase the required bandwidth by up to 8%, see the 'VoIP Security' chapter of [Avaya IP Office™ Platform Security Guidelines](#).

In addition to the network requirements for VoIP calls, additional bandwidth should be reserved for the corresponding inter-node signaling and management paths. This should include any access via SSLVPN (IPOSS) or Remote Support Service (RSS). The following suggested minimum bandwidths should be made available for these additional paths:

| Traffic | Suggested Minimum Bandwidth | Comments |
|---|---|--|
| Inter-node Signaling/ Status | 256 kbit/s | Between Primary and each Expansion Between Primary and Secondary Between Secondary and each Expansion. Limited signaling/status directly between Expansions Bursty traffic, peaking after start-up or restoration of node to node connectivity. |
| one-X Portal CTI | 96 kbit per call (or 192 kbit/s @ 7,200 BHCC) | Between one-X Portal server location and Expansion when one-X Portal server active. |
| Web Management | 512 kbit/s | Between Web Manager PC and Primary (or Secondary under failover conditions) when a Web Management session is active |
| IP Office Server Edition Manager | 512 kbit/s | Between SE Manager PC and each node when a IP Office Server Edition Manager session is active |
| Upgrade | 512 kbit/s | Between Primary and each node when upgrade is being performed |
| Backup/Restore | 256 – 2048 kbit/s | Between Backup Server and each Expansion Between Backup Server and Primary Between Backup Server and Secondary An IP Office Linux platform can be designated as the backup server. Bandwidth is only required when a backup or restore operation is active, and only between participating nodes. The bandwidth required depends on the backup/restore content. |
| Voicemail Pro client | 512 kbit/s | Between Voicemail Pro PC and Primary (or Secondary under failover conditions) when a Voicemail Pro server management session is active |

Table continues...

| Traffic | Suggested Minimum Bandwidth | Comments |
|--|--|---|
| Voicemail Pro Server <> Voicemail Pro Server | 1024 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| | 32 kbit/s per active channel | Extra traffic between Secondary and Primary when Dual Voicemail Pro active |
| Voicemail Pro Server <> IP Office Media Manager | 32 kbit/s per active channel | Bursty SFTP traffic, between Primary and external server running IP OfficeMedia Manager. Typically IP Office Media Manager runs coresident with Voicemail Pro. For dual active Voicemail Pro, the Secondary Voicemail Pro will send all recordings to the server running IP Office Media Manager. |
| Web Collaboration Client | 128 – 256 kbit/s | Between each active Web Collaboration client and the Web Collaboration server |
| WebRTC Client | 6 – 256 kbit/s | Between each active Avaya Communicator for Web client and the WebRTC Gateway |
| one-X Server <> one-X Server | 1–500 users: 512 kbit/s 500–1500 users: 1024 kbit/s 1500–3000 users: 2048 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| SoftConsole | 64–1024 kbit/s | Bursty traffic, peaking after start-up. Higher figure for maximum 3000 user deployment. Between each SoftConsole application and the IP Office server. |
| SMDR | 1 kbit per call report (or 7.2 kbit/s @ 7,200 BHCC) | Average SMDR message size for typical call pattern |
| RSS to co-located server | 64 –1024 kbit/s per TCP Tunnel | Between remote client and col-located server when a remote management session is active |

- These figures are for general guidance only as they do not reflect the specific requirements for a given installation. For example management operations are typically session based; backup/restore content and frequency are administerable; many are bursty in nature and may or may not coincide with others.
- Only the major signaling and management paths are included here, further network bandwidth may be required for SSA, SysMonitor, syslog, SNMP, etc.
- An IP Office port matrix document that covers all possible IP communications should also be consulted. It is available via the Avaya Support site (<https://support.avaya.com>).
- Server internal communications do not require bandwidth assessment

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Multi-Site Network Link Capacities

A multi-site network link is the IP Office Line connection between each server (node). The links are arranged in a star topology with the Primary Server at the center, or double star when a Secondary is present.

Regardless of direct/indirect media, VCM or codec used, a further capacity consideration is the multi-site network links between all nodes. Each IP500 V2 or Linux link has a maximum capacity of 250 channels/calls (500 for IP Office Select Linux servers). The maximum total and outgoing channels are independently configurable in Manager via the **IP Office Line > VoIP Line** tab, and have a default of 128 for both.

This is per link, not a per system limit; for example a Primary or Secondary may have up to 250/500 concurrent calls to each Expansion system. Due to the star topology of IP Office Server Edition, calls between Expansion systems typically go via the Primary or Secondary and therefore these calls must also be taken into account when considering Multi-site network link capacity.

For IP Office Select/IP Office Subscription, it is possible to add IP Office lines between expansion Systems. There is a limit of one link between each pair of expansions. This link can be used to increase capacity or resilience. Calls between Expansions will go direct rather than via the Primary/Secondary.

It is not possible to add additional multi-site network links between the Primary/Secondary and Expansions – if the capacity is exhausted an additional Secondary or Expansion system should be considered.

The following occurs if the maximum numbers are exceeded:

- If the configured values are exceeded, additional outgoing calls can be routed via ARS configuration providing an alternative route exists; additional incoming calls are automatically routed, again providing an alternative route exists.
- Alternative routes only exist when a Secondary Server is present.
- If no alternative route, incoming calls remain ringing until a channel is free, outgoing calls indicate busy.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Resilience and Failover

Resilience is supported in Linux-based networks. However, the use of resilience requires consideration of various capacity issues:

- The total extensions/users on any single Primary, Secondary or Expansion must not be configured to exceed their supported limits under any circumstances.

- Primary failure when Secondary present will route all non-local Expansion calls, Voicemail leave and collect, IVR and Auto Attendants to the Secondary
- Primary failure when Secondary present will move Hunt group processing and management access to the Secondary. This will increase the management bandwidth from the Secondary to the Expansion systems.
- Users whose extension or application fails over retain their existing user profiles rights without needing or consuming an licenses on the fallback server.
- Any voicemail channel entitlements associated with the Primary, move to the Secondary on failover; no separate license provision on the fallback server is required – unless the dual active Voicemail Pro feature is enabled.

For further information, refer to the [IP Office Resilience Overview](#) manual.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Small Community Network Capacity

IP500 V2 servers can be used in a network of IP Office servers. The details here cover IP500 V2 servers connected in a Small Community Network (SCN). For use as expansion servers in Server Edition/Select networks, see [Extension/User/Site Capacity](#) on page 23.

Small Community Network Capacity

- Maximum: 32 nodes with a total of 1000 users.
- If using a Unified Communications Module:
 - If using the Unified Communications Module to provide voicemail, the network is limited to 6 nodes.
 - If using the Unified Communications Module to also support Avaya one-X Portal, the network is limited to 200 users and 50 portal sessions at any time.

Related links

[IP500 V2/V2A Servers](#) on page 35

Maximum Trunk Capacity

A single IP500 V2/V2A Expansion can support up to:

- 204 Analog trunks total
- 8 E1/PRI digital trunks with 240 channels total

- 8 T1/PRI digital trunks with 192 channels total
- 16 BRI digital trunks with 32 channels total
- 125 SIP trunks with 128 concurrent calls total
- 32 H323/SCN trunks with 250 concurrent calls per trunk

This is a theoretical maximum possible trunk channels that can be supported, but other factors will reduce what can be utilised on a concurrent basis:

- Available licenses
- Trunk configuration
- VCM channels
- Maximum server call capacity

Analog and digital trunk capacity is dependent upon the hardware fitted to the system unit. The following table shows the various constructs and the resulting maximum (note that many variants are not shown):

| Trunk Card #1 | Trunk Card #2 | Trunk Card #3 | Trunk Card #4 | Exp. Module #1-8 | Exp. Module #9-12 | Max BRI | Max PRI E1/T1 | Max Analog |
|---------------|---------------|---------------|---------------|------------------|-------------------|---------|---------------|------------|
| Dual PRI | Dual PRI | Dual PRI | Dual PRI | ATM 16 | - | 0 | 240/192 | 128 |
| ATM 4 | ATM 4 | ATM 4 | 4 Port Exp. | ATM 16 | ATM 16 | 0 | 0 | 204 |
| BRI 8 | BRI 8 | BRI 8 | BRI 8 | ATM 16 | - | 32 | 0 | 128 |
| - | - | - | - | - | - | 0 | 0 | 0 |

| Server Type | Maximum Registered SIP Trunks | Total SIP Trunk Calls (direct/indirect media) | Maximum IP Office (SCN) Trunks | Maximum Calls per SCN Trunk |
|--------------|-------------------------------|---|--------------------------------|-----------------------------|
| IP500 V2/V2A | 125 | 128/120 | 32 | 250 |

- The Total SIP Trunk Calls figure is effectively the maximum number of concurrent SIP trunk calls/sessions. They can be distributed over one or more trunks on the same system.
- SIP trunk concurrent call capacity is also limited by available licenses and the **SIP Line > SIP URI > Max Calls per Channel setting**.
- The number of SIP Trunk session licenses requested by each system is defined by the **Maximum SIP Sessions** setting on the **License > Remote Server > Reserved Licenses** tab of IP Office Server Edition Manager. One available SIP Trunk session license enables one concurrent SIP session/call.
- The maximum number of configured URIs per SIP trunk is 150. This is not correlated with maximum SIP trunks or concurrent calls.
- The Maximum Calls per SCN Trunk figure is the maximum number of concurrent sessions supported on a single inter-node link whether WebSocket or Proprietary type. Note that the

number of SCN channels is controlled by the **Number of Channels** setting on the **IP Office Line > Line** tab of IP Office Server Edition Manager.

- H323 trunks are distinct from SCN, but are taken from the same capacity pool.
- The PRI trunk capacity is also limited by available licenses. One available PRI Trunk Channel license enables one concurrent PRI call.

Related links

[IP500 V2/V2A Servers](#) on page 35

VCM Channel Capacity

Voice Compression Module (VCM) channels allow the IP500 V2 Expansion to convert media (for example speech) between analog/digital and IP. These are essential when routing analog/digital trunk calls to or from VoIP endpoints.

It is important to note that in a Linux-based server network, media communication with any other server components requires the use of VoIP, including Primary, Secondary, other expansions, call recording, attendants, IVR, conferencing and voicemail.

Local IP500 V2/V2A Expansion conferences and music on hold use the digital domain; hence all VoIP parties (trunk or extension) require a VCM channel.

VCM channels are also used to perform VoIP transcoding. Transcoding is used where the VoIP codec differs between two legs of a call; for example a VoIP endpoint supporting only G.729 calling a SIP trunk with only G.711. This case uses 2 VCM channels and should be avoided wherever possible.

The following table summarizes VCM channel usage.

| Endpoint A | Endpoint B | Channels used [1] | Notes |
|--|-----------------------------------|----------------------|--|
| Analog/Digital trunk or extension | Analog/Digital trunk or extension | None | D100 and DECT R4 endpoints are classified as VoIP |
| | Local Conference | None | Conference hosted on the IP500 V2 |
| | Local Music on Hold | None | |
| | Embedded Voicemail | None | Includes voicemail, attendants, announcements Embedded Voicemail not supported in IP Office Server Edition |
| Analog/Digital trunk or extension | VoIP trunk or extension | 1 | |
| | Central Voicemail | 1 | Includes voicemail, IVR attendants, announcements |

Table continues...

| Endpoint A | Endpoint B | Channels used [1] | Notes |
|--------------------------------|-----------------------------------|---------------------------------|---|
| | Remote Conference | 1 | |
| | Remote Music on Hold | 1 | Maximum of 3 MOH sources streamed from Primary Server using a maximum of 3 VCM channels |
| | Call recording | 1 | Using Voicemail Pro or ACCS. |
| VoIP trunk or extension | VoIP trunk or extension | None ^[2] | VoIP endpoints includes IP Office Line (SCN trunk), SM and H323 lines, DECT endpoints |
| | Central Voicemail | None ^[2] | Includes voicemail, IVR attendants, announcements |
| | Remote Conference | None ^[2] | |
| | Remote Music on Hold | None ^[2] | Streamed from Primary Server |
| | Call recording | None ^[2] | Using Voicemail Pro or ACCS. |
| VoIP trunk or extension | Analog/Digital trunk or extension | 1 | |
| | Local Conference | 1 | Conference hosted on the IP500 V2 |
| | Local Music on Hold | 1 per MOH source ^[2] | Maximum of 4 MOH sources. One VCM channel is used per codec type per source. |
| | Embedded Voicemail | 1 | Includes voicemail, attendants, announcements Embedded Voicemail is only supported for non-networked IP500 V2/V2A servers. |

1. Unless otherwise specified, the VCM channel is used for the duration of the call and the VCM resource is always local.
2. Assumes both endpoints' VoIP codecs match, if they do not match 2 VCM channels are used.

Three base card types provide VCM channel capacity for the IP500 V2/V2A Expansion:

- VCM 32
- VCM 64
- Combination card

Each base card can carry a trunk module, however the Combo card can only support BRI and analog. Hence, if more than two dual PRI cards are required, the VCM capacity is reduced. Also note that the type of trunk module fitted to the Combo card is fixed.

The following table shows various constructs and the resulting theoretical maximum. Not all the variants are listed. Only those variants that provide the maximum capacity are listed.

| Base Card #1 | Base Card #2 | Base Card #3 | Base Card #4 | Maximum G.711 calls | Maximum G.729 calls | Maximum G.723 calls | Maximum G.722 calls |
|--------------|--------------|--------------|--------------|---------------------|---------------------|---------------------|---------------------|
| VCM 64 | VCM 64 | - | - | 128 | 120 | 88 | 120 |
| VCM 64 | VCM 64 | Combo | - | 138 | 130 | 98 | 130 |
| VCM 64 | VCM 64 | Combo | Combo | 148 | 140 | 108 | 140 |

The capacity in the above table is for a bidirectional channel between a VoIP and an analog or digital endpoint and assumes the calls are of the same codec type. Differing codec types can be supported at the same time; the lowest channel figure should be used for calculations.

If VCM channels are used to convert SRTP media, a maximum of 40 calls per system are supported regardless of codec type.

The IP500 V2/V2A Expansion manages this common resource as efficiently as possible but if there are insufficient at any one time:

- Outgoing calls will not get connected (they do not receive dial tone)
- Incoming calls will queue until a VCM channel is free
- Transfers cannot be made

Related links

[IP500 V2/V2A Servers](#) on page 35

Voicemail or Auto-Attendant or IVR

Leaving a Voicemail for a user or hunt group will use one licensed (and available) voicemail channel and consume one from the indirect media call capacity of the Voicemail Pro server (Primary or Secondary).

If the endpoint is remote, an IP Office Line (SCN trunk) channel is used. If the source of the call is digital/analog, a VCM channel is also required.

A voicemail collect operation uses the same resources as voicemail leave. Invoking an Auto Attendant, Announcement or IVR script uses the same resources as voicemail, and is taken from the same pool of licenses and voicemail channel capacity; one active Auto Attendants/IVR/Announcement takes one channel and license.

The total solution voicemail channel capacity is determined by a number of factors:

- The number of per-server supported voicemail channels:

| Server | Maximum Voicemail Channels |
|---------------|----------------------------|
| Dell R640/OVA | 250 |
| HP DL360 | 150 |
| Dell R230 | 75 |

Table continues...

| Server | Maximum Voicemail Channels |
|---------------------|---|
| IP500 V2/V2A UCM V2 | 40 (20 when Avaya one-X® Portal is running on the module) |

- If dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) – this doubles the maximum capacity to 500 channels.
- The number of licensed voicemail channels: Each active master Voicemail Pro must have its own licenses. It inherits the other set when active as a backup.
- Call recording also uses licensed voicemail channels. One active recording channel consumes one voicemail/AA channel.

Dual Voicemail Server Operation

When the dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) and not under failover conditions, users are provided voicemail services (voicemail, announcements, call recording, auto attendant, IVR, etc) services from one of the Voicemail Pro servers:

- All Primary users' voicemail invocations are directed to the Primary Voicemail Pro instance.
- All Secondary users' voicemail invocations are directed to the Secondary Voicemail Pro instance.
- All Expansion users' voicemail invocations are directed to the Voicemail Pro instance defined by the **System > Voicemail > Voicemail Destination** setting. This is initially selected by the Initial Configuration Utility (ICU).

Administration

To ensure Voicemail Pro channel capacity is available for voicemail, call flow and announcement operations, the IP Office Server Edition Manager settings Voicemail Channel Reservation on the Primary and **Secondary Server's System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

Mailbox capacity

The Voicemail Pro automatically creates a mailbox for each user and hunt group in the IP Office configuration. The individual capacity is fixed at 60 minutes per user or group mailbox.

If voicemail channel resources run out:

- Unanswered calls continue to alert rather than going to voicemail.
- Voicemail collect fails to connect to the voicemail.
- Calls to attendants and call-flows will continue to alert. However, text-to-speech (TTS) will not be output during call flows.
- Announcements are not played.
- Note that the TTS channel capacity is 250.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

What happens if mailbox storage resources run out?

- Voicemail leave operations will receive an announcement that the user/group's mailbox is full.
- Voicemail collect will continue to function.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Chapter 7: Linux Expansion Server

When designing a IP Office Server Edition solution that includes a Linux-based Expansion System, the same aspects that are covered for the [IP500 V2/V2A Servers](#) on page 35 need to be assessed, with the following differences:

- Maximum extension capacity for each Linux Expansion:
 - No digital or analog extensions
 - Maximum users/extensions 750 (including DECT R4).
 - 128 maximum remote worker 9600 Series H323 extensions.
- Maximum trunk capacity for each Linux Expansion:
 - No digital or analog trunks.
 - Maximum SIP sessions/calls 256 total.
- The concurrent call capacity of the Linux Expansion:
 - No analog/digital calls
 - Indirect media capacity 128 (64 when SRTP used)
 - Direct media capacity 750
- The VCM channel capacity for each Linux Expansion:
 - Only transcoding is relevant; 128 channels
 - There is no capacity difference due to codec type



Note:

The server type may additionally be an HP DL360G7, Dell R640 or OVA. However, the supported capacities/performance are not increased.

All of the above should be assessed as one factor may limit another.

Chapter 8: General Capacity Considerations

The following capacity topics apply to all types of server and mode of operations.

Related links

- [Account Codes](#) on page 58
- [Audio Conferencing](#) on page 14
- [Button Modules](#) on page 60
- [Appearance Button Programming](#) on page 61
- [Call Destination Server](#) on page 18
- [Call Logs/Call History](#) on page 62
- [Call Recording](#) on page 19
- [Media Manager Recording Capacity](#) on page 65
- [Call Traffic Profile](#) on page 21
- [CTI & TAPI](#) on page 67
- [DECT R4](#) on page 68
- [Directory](#) on page 69
- [Hunt and Presence Groups](#) on page 25
- [Incoming Call Routes](#) on page 70
- [IP Infrastructure, Bandwidth and VoIP QoS](#) on page 26
- [IP Office SoftConsole](#) on page 73
- [Multi-Site Network Link Capacities](#) on page 28
- [Paging](#) on page 75
- [Remote Support Services](#) on page 76
- [Resilience and Failover](#) on page 29
- [Unified Messaging Capacity](#) on page 77
- [Voicemail or Auto-Attendant or IVR](#) on page 31
- [WebRTC Gateway](#) on page 80
- [Web Collaboration](#) on page 81
- [WebLM Server](#) on page 81

Account Codes

A maximum of 1500 account codes are supported on any IP Office server. For servers in a network using consolidated objects, that also sets the maximum for the whole network.

The maximum is for account codes entered into the system configuration. Using wildcards in the account code entries, a larger number of dialed account codes can match configured codes.

Related links

[General Capacity Considerations](#) on page 57

Audio Conferencing

Primary/Secondary Server

Each Primary and Secondary supports a local audio conference capability with the following capacities:

| System Mode | Primary/Secondary server | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------------|--------------------------|---------------------------|-------------------------|-------------------------------------|
| IP Office Server Edition | Dell R240 | 128 | 128 | 414 |
| | HP DL360 | 256 | 256 | 825 |
| | Dell R640 | 256 | 256 | 1650 |
| | OVA | 256 | 256 | 1650 |
| IP Office Select | Dell R640 | 512 | 256 | 1650 |
| IP Office Subscription | OVA | 512 | 256 | 1650 |

IP500 V2/V2A and Linux Expansion System

Each IP500 V2/V2A and Linux Expansion System supports a local audio conference capability with the following capacities:

| Expansion Platform | Total Conference Channels | Maximum conference size | Total Conference Channels with ACCS |
|--------------------|---------------------------|-------------------------|-------------------------------------|
| Linux/OVA | 128 | 128 | 128 |
| IP500 V2/V2A | 128 | 64 | 128 |

System Conferences

System conferences use the same conference capacity as above but are subject to the following additional limits:

- **IP Office Essential Edition/Preferred Edition:** 30.
- **IP Office Server Edition/IP Office Select:** 120. System conferences are hosted by the primary server (secondary server during resilience).

Notes

- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- The figures cover both ad-hoc and meet-me conference types.
- With one-X Portal users active, a solution-wide limit of 750 conference channel participants applies, but this does not include conferences used for call recording.
- IP Office Server Edition supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
- The increased capacities for ACCS are only supported when the applications are actively connected to the host IP Office and should only be used for call recording purposes.
- No dynamic solution-wide conference allocation is supported, only static via call flows or Conference Meet Me short code Line Group ID.
- V2 Expansion conferences exist in the digital domain; hence all VoIP parties (trunk or extension) will require a VCM channel for the duration. See [VCM Channel Capacity](#) on page 51.
- Further information on conferences can be found at: http://marketingtools.avaya.com/knowledgebase/businesspartner/ipoffice/mergedProjects/manager/_frame2.html?Conferencing.Overview.html

Which Servers Conference Resources are Used?

The location of the conference resource used when a conference is started are determined by a number of factors:

- A user performing an ad-hoc conference uses the conference resources of the server on which they are logged in.
- A meet-me conference using a user's personal meet-me bridge uses the conference resources of the server on which they are logged in.
- A meet-me conference created by Voicemail Pro call flow, or the Conference meet-me short code feature use the system on which the feature was invoked.
- To invoke a meet-me Conference using the resources of a remote system, use the Line Group ID field of the Conference Meet Me short code feature. By default this is set to 0, for local system.
- For the case where a conference is scheduled by Avaya one-X® Portal and at the scheduled time the conference dials the delegates: The conference location is the server to which the active Avaya one-X® Portal is attached.

Recording a conference requires an additional conference channel, as well as an IP Office Line (SCN trunk) channel to the recording destination (Primary or Secondary Server, alternate during fail over operation). Neither IP Office nor Voicemail Pro can automatically link or move conference locations, but existing conferences can be connected together.

When conference resources run out, attempts to record calls, join or create conferences are rejected.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Button Modules

Button module capacity is defined in terms of the total number of additional buttons per system, whether used or not.

| System Mode | Platform | Total Buttons | Maximum | | | |
|--|---------------|---------------|---------|-------|--|----------------------------|
| | | | BM32 | DBM32 | BM12 SBM24 JBM24 JEM24 ^[2] | Appearances ^[1] |
| IP Office Server Edition | All | 4096 | 128 | - | 170 | 20 |
| IP Office Select IP Office Subscription | All | 8192 | 256 | - | 340 | 40 |
| All | IP500 V2/ V2A | 1024 | 32 | 32 | 42 | 10 |

- Maximum Appearances is the supported limit for the total solution-wide buttons that can be programmed to the same call appearance, line appearance or covered user.
- With J179/J169 phones, JEM24 button module capacity depends on whether a single or multiple modules are attached to phones:
 - A single JEM24 module on a phone provides 72 buttons in 3 pages of 24. In this mode, single modules are equivalent to 3 modules for overall capacity.
 - Multiple JEM24 modules on a phone only provide 24 buttons each.
- Capacities are regardless of whether the buttons are configured for use or not, and whether physical or logical (as in the case of BM12 or JEM24).
 - BM12: 24 buttons each in 2 pages of 12. 9608, 9611 and 9641 IP telephones.
 - BM32: 32 buttons each. 1616 IP telephones.
 - DBM32: 32 buttons each. 1416 digital telephones.
 - JBM24: 24 buttons each. J169 and J179 IP telephones.

- JEM24: J169/J179 - 24 or 72 buttons each, see note 2 above. J189 - 24 buttons each.
- SBM24: 24 buttons each. 9608, 9611 and 9641 IP telephones.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Appearance Button Programming

The following limits apply to appearance buttons:

- Supported maximum number of bridged appearances to the same call appearance.
- Supported maximum number of line appearances to the same line.
- Supported maximum number of call coverage appearances of the same covered user.

The limits are:

- 10 for IP500 V2/V2A systems.
- 20 for Server Edition.
- 40 for Server Edition Select and Linux-based IP Office Subscription.

MADN Buttons

You can have up to 30 MADN buttons associated with the same user.

Related links

[General Capacity Considerations](#) on page 57

Call Destination Server

When considering Expansion or Server planning from a media perspective it is important to note that communication with any other IP Office Server Edition component will use VoIP and hence is limited by the media, IP Office Line (SCN trunk) and VCM capacities. This includes:

- Calls to/from Primary/Secondary and other Expansions
- Call recording - one VoIP channel per recorded call. Destination is the location of the active Voicemail Pro.
- Auto Attendants/IVR - one VoIP channel per call when connected to the Auto Attendant/IVR. Destination is the location of the active Voicemail Pro.

- Conferencing when the conference focus is not the local system - one VoIP channel per local member
- Local conferences involving remote users - one VoIP channel per remote member when connected to the conference
- Voicemail leave and collect - one VoIP channel per VM caller when. Destination is the location of the active Voicemail Pro.
- Announcements - one VoIP channel per call when generating announcements. Destination is the location of the active Voicemail Pro.
- Centralized Music on Hold – one VoIP channel per central MOH source when playing to held calls. Destination is the location of the Music on Hold source.

For all VoIP connections between systems, the codec used will be according to the IP Office Line settings of those two nodes.

Consideration should also be given to intermediate destinations to ensure adequate capacity is present. For example a consultation call will open a secondary channel for the consultation whilst keeping the initial call connected.

Lastly, any call on the IP Office Line will take into consideration administered channel limits and Call Admission Control (CAC) if active. Please refer to the CAC section of the IP Office administration documentation for behaviors when CAC limits are exceeded.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Call Logs/Call History

The following call log capacities are supported:

| Platform | Personal Call Log Per User |
|--------------------------|----------------------------|
| Linux/OVA ^[1] | 60 |
| IP500 V2/V2A | 30 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- For calls from/to the same number, the system only keeps the details of the last such call status plus a count of the number of such calls.
- If a user hot desks to/from a IP500 V2/V2A Expansion, only the last 30 retained.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.

- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Call Recording

Each Primary and Secondary supports a voice call recording capability with the following capacities:

| System Mode | Platform | Recording Channels | | |
|----------------------------|--------------------|-----------------------|----------|--------------------|
| | | Server ^[1] | Solution | Solution with ACCS |
| IP Office Server Edition | Dell R240 | 75 | 75 | 175 |
| | HP DL360 | 150 | 150 | 350 |
| | Dell R640 | 150 | 150 | 500 |
| | OVA ^[1] | 150 | 150 | 500 |
| IP Office Select | Dell R640 | 250 | 500 | 500 |
| | OVA ^[1] | 250 | 500 | 500 |
| IP500 V2 Preferred Edition | | 40 | 40 | 40 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 - Call recording uses a 3-party conference per recorded call. Note that without ACCS connected, the primary server does not have sufficient conference channels for the whole solution - other server's conference resources must be used.
 - Conference recording adds a further conference channel to an existing conference.
 - Each recording requires one licensed (and available) voicemail channel, a VCM (for the IP500 V2 Expansion) and IP Office Line (SCN trunk) channel as the recording destination is on the Primary or Secondary Server. See [VCM Channel Capacity](#) on page 51.
 - The system supports differing capacity and performance levels when Avaya Contact Center Select (ACCS) is attached. See [Avaya Contact Center Applications](#) on page 12.
 - The increased capacities for ACCS are only supported for call recording, and are active when the application is connected to the host IP Office.

- The solution internal call recording capacity is fixed at 333 hours total (555 hours for IP Office Select). This is separate from the voicemail mailbox recording capacity, see [Voicemail or Auto-Attendant or IVR](#) on page 31. It is also separate from Media Manager storage capacity, see [Media Manager Recording Capacity](#) on page 65.
- The Media Manager application supports recordings management at the maximum channel and call rate appropriate to the server platform.
- If the dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) the maximum solution capacity is doubled to maximum of 500 channels, the per-server capacity remains unchanged.
- One active recording channel consumes one voicemail/AA channel. If the call is being recorded in two places – for example at the user and the incoming trunk – two licensed and available voicemail channels are required.
- Maximum recording call rate is 7200/9000/10000 BHCC for a primary/secondary Linux-based server, 3,600 BHCC for an Expansion. See [Call Traffic Profile](#) on page 21.

Recording call rate is further reduced for ACCS. See [Avaya Contact Center Applications](#) on page 12.

Which Servers Conference Resources are Used?

The location of conference resource used is determined by the point of recording:

- Incoming Call Route (ICR) recording is done at trunk's location
- User recording is done at user's location.
- Hunt group recording is done at the group's location.
- System recording is done at the system's location.
- Conference recording at conference location: Ad-hoc conference recording is done at the initial user's location. Meet-me conference recording can specify the location.
- Account code recording is done at the user's location.

Administration

To ensure Voicemail Pro channel capacity is available for recordings, the IP Office Server Edition Manager settings **Voicemail Channel Reservation** on the Primary and Secondary Server's **System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

- If recording channel resources run out:
 - If the recording is mandatory, busy is returned.
 - If the recording is not mandatory, further attempts to record calls or conferences are not successful, but there may still be visual recording indications.

If exceeded:

If recording storage resources run out, further attempts to record calls or conferences will not be successful and receive announcements to that effect.

Related links

[Primary and Secondary Server Capacity](#) on page 14
[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Media Manager Recording Capacity

Media Manager requires an additional drive which it use as the location of its primary call storage folder. Media Manager uses this location to store recordings after transferring them from the temporary storage folder used by Voicemail Pro.

Important:

- Avaya does not support Media Manager using the same drive that is hosting the Voicemail Pro service. Doing so will cause space conflicts with other IP Office applications and risks losing recordings during other IP Office maintenance activities.

You must either:

- Add an additional drive to the server hosting the Voicemail Pro service. Avaya recommends you add a pair of drives configured for RAID.
- Configure a cloud-based service as the primary call storage. Media Manager supports the following:
 - Google Bucket
 - Azure Blob
 - Amazon S3 Bucket

In operation, you can optimize the use of the primary call storage by having Media Manager also copy recordings to separate archive storage, which can be a DVD, NAS or cloud-based storage. After a time, the primary call storage will contain just the newest recordings whilst the archive contains old recordings.

Estimating the storage capacity required

The required capacity for the storage you use for Media Manager depends on factors that will vary between different customers. You need to estimate the typical number and length of calls recordings that the customer's business will generate.

You also need to include how long the customer wants to retain recordings, and how the customer wants to use recordings in the primary call storage and those in a separate archive (if installed).

For both types of storage, you can use the following figures:

- Media Manager recordings require 60KB a minute for non-authenticated files, 120KB a minute for authenticated files.
- For the primary call storage, the minimum size Avaya support is 30GB. However, Avaya recommends 300GB or larger.

Related links

[General Capacity Considerations](#) on page 57

Call Traffic Profile

General traffic engineering is outside the scope of this document, however the following IP Office Server Edition factors should be considered:

| System Mode | Platform | Maximum Call Rate (BHCC) | |
|--------------------------|--------------------------|------------------------------|------------------------------|
| | | Server | Solution |
| IP Office Server Edition | Dell R240 | 7,200 | 7,200 |
| | HP DL360G7 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| | Dell R640 | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| | OVA ^[1] | 18,000/9,000 ^[3] | 18,000/9,000 ^[3] |
| IP Office Select | Dell R640 ^[2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| IP Office Subscription | OVA ^[1, 2] | 20,000/10,000 ^[3] | 20,000/10,000 ^[3] |
| All | Linux | 7200 | - |
| | IP500 V2/V2A Expansion | 3600 | - |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 2. These platforms (Dell R640 or OVA) only. Other servers only support the lower 18,000/9,000 call rate.
 3. Lower call rate when any Avaya one-X[®] Portal user active.
- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
 - Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
 - Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
 - Total solution BHCC must not exceed 9,000/10,000 BHCC when Avaya one-X[®] Portal users are active
 - Continuously running at the maximum supported solution call rate when Avaya one-X[®] Portal users are active should not exceed 24 hours.
 - Avaya one-X[®] Portal users include: Web Client, Call Assistant, Outlook Integration, Lync Integration, one-X preferred Mobile Clients
 - The maximum rate for call recording and Voicemail leave combined is 7,200/9,000/10,000 BHCC.
 - The Maximum Solution Call Rate can be further reduced by the presence of Call recording, CTI or Contact Center application such as ACCS. See [Avaya Contact Center Applications](#) on page 12.
 - IP Office Subscription is an OPEX licensed offer which supports the same capacity and performance as IP Office Select (see [IP Office Select/IP Office Subscription](#) on page 11). A

stand-alone IP500 V2/V2A running IP Office Subscription has the same capacity as other IP500 V2/V2A offers (see [IP500 V2/V2A Servers](#) on page 35).

The following occurs if these figures are exceeded:

If the call rate is exceeded, there may be disruption to call voice quality, recordings, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

CTI & TAPI

Each CTI or TAPI connection contributes to the overall loading of a system, whether directly or indirectly connected. Capacity is specified in three ways per system:

- Total number of CTI links (sessions)
- Number of CTI controlled users per session
- Total number of CTI controlled users

| System Mode | Platform | Maximum CTI sessions | Maximum CTI users per session | Total CTI controlled users | Maximum BHCC |
|--------------------------|--------------------|----------------------|-------------------------------|----------------------------|--------------|
| IP Office Server Edition | Dell R240 | 5 | 750 | 3750 | 9000 |
| | HP DL360G7 | 5 | 1500 | 7500 | 9000 |
| | Dell R640 | 5 | 2000 | 10000 | 9000 |
| | OVA ^[1] | 5 | 2000 | 15000 | 10000 |
| IP Office Select | Dell R640 | 5 | 3000 | 15000 | 10000 |
| IP Office Subscription | OVA ^[1] | 5 | 3000 | 15000 | 10000 |
| All | IP500 V2/V2A | 3 | 384 | 1152 | 7200 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
- An active Avaya one-X[®] Portal or ACCS server counts as one CTI session for each and every server in the solution.
- An active Avaya one-X[®] Portal is one that has at least one portal client of any type or an open API session.

- An active 3rd Party TAPI session counts as one CTI session for that IP Office.
- All 1st party TAPI sessions together count as one CTI session for that IP Office.
- An active one-X Portal makes every user a CTI controlled user for each and every system.
- An active ACCS makes every Agent a CTI controlled user for that IP Office.
- An active portal open API session counts as one CTI session for each and every system.
- A single portal open API session supports the BHCC and CTI users per session quoted above.
- An Avaya Workplace Client counts as one SIP extension and one CTI load. It does not use Avaya one-X® Portal capacity.
- Avaya Communicator for Web counts as one SIP extension, one WebRTC load and one Avaya one-X® Portal client.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

DECT R4

The IP Office system can support DECT handsets through the attachment of a DECT R4 system. The following capacity considerations apply:

- The DECT handset capacity must be within the overall extension capacity of the IP Office system solution.
- Each DECT R4 system supports:
 - A maximum of 750 DECT extensions (384 on IP500 systems).
 - A maximum of 256 DECT base stations. 128 of those can be digital base stations connected through IP DECT Digital Gateways.
 - For digital base stations, up to 8 IP DECT Digital Gateways, each supporting up to 16 digital base stations.
 - Up to 2000 directory entries from the IP Office system.

Related links

[General Capacity Considerations](#) on page 57

Directory

The following directory capacities are supported:

| Platform | System Directory | | | Personal Directory | |
|--------------------------|------------------|--------|---------------|--------------------|------------|
| | LDAP | HTTP | Configuration | Per User | Per System |
| Linux/OVA ^[1] | 10,000 | 10,000 | 10,000 | 250 | 100,000 |
| IP500 V2/V2A | 10,000 | 10,000 | 2,500 | 250 | 10,800 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- The system directory capacity is solution-wide and cannot exceed 10,000 entries total
- Any duplicate entries are discarded on import.
- Only the Primary can be administered with external directory entries as part of the configuration.
- The display of directory entries is limited on some phones:
 - 1100/1200 cannot support above 1000 directory entries.
 - DECT R4 cannot support above 2000 directory entries.
 - D100/D160 DECT cannot support above 100 directory entries.
- If the number of supported entries is exceeded, the directory is truncated to the supported system limit.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Hunt and Presence Groups

Hunt Groups are sets of telephone users targeted by calls. Presence groups are sets of XMPP users for IM purposes. Both are viewed together for group capacity, of which there are both per-solution and per system limits:

| System Mode | Platform | Maximum Server Group size | Maximum Groups | | Total Hunt Solution Group Members |
|--|--------------|---------------------------|----------------|----------|-----------------------------------|
| | | | Server | Solution | |
| Essential Edition Preferred Edition | IP500 V2/V2A | 384 | 200 | 300 | 3000 |
| IP Office Server Edition | Linux/OVA | 750 | 300 | 300 | 3000 |
| | IP500 V2/V2A | 384 | 200 | 300 | 3000 |
| IP Office Select | Linux/OVA | 1250 | 600 | 600 | 6000 |
| IP Office Subscription | IP500 V2/V2A | 384 | 200 | 600 | 6000 |

- Maximum Solution Groups is the total number of hunt and presence groups over the whole solution.
- Maximum Server Group size is the maximum number of members in a single hunt/presence group.
- Total Solution Group Members is the total members over all hunt/presence groups.

The following occurs if these figures are exceeded:

- IP Office Manager does not permit the administration of more than 300 solution groups if the solution is not IP Office Select or IP Office Subscription.
- IP Office Manager does not permit the administration of more than 750 per group members if the solution is not IP Office Select or IP Office Subscription.
- If the number of groups or individual size is exceeded (particularly if the **Ring Mode** is **Collective** or **Collective Call Waiting**), there may be inaccurate hunt group call presentation, or a general slowdown in other operation such as UC or management clients.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Incoming Call Routes

The following maximums apply to the number of supported incoming call routes.

| System Mode | Platform | Maximum Server | Maximum Solution |
|--------------------------|----------|----------------|------------------|
| IP Office Server Edition | | 2300 | 4600 |

Table continues...

| System Mode | Platform | Maximum Server | Maximum Solution |
|------------------------|--------------|----------------|------------------|
| IP Office Select | | 3000 | 6000 |
| IP Office Subscription | | | |
| Expansion | Linux | 1000 | As above |
| | IP500 V2/V2A | 1000 | - |

Related links

[General Capacity Considerations](#) on page 57

IP Infrastructure, Bandwidth and VoIP QoS

It is not within the scope of this document to cover detailed aspects of Ethernet and IP infrastructure.

- IP500 V2 supports two 10/100 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS support.
- Avaya IP Office Linux servers supports two 10/100/1000 Mbit/s, Full/Half duplex 802.3 Ethernet interfaces with DSCP/ToS and static 802.1Q VLAN support.
- Subject to IP infrastructure: All supported IP Office traffic can be routed via a single LAN interface: All supported IP Office traffic can be routed between the LAN interfaces, however this may lead to inefficiencies and limit performance for the IP500 V2 platform.

For more information on LAN interface support, see the IP Office Server Edition LAN Support chapter of "[Deploying IP Office Server Edition](#)".

Note that secure VoIP (SRTP) can increase the required bandwidth by up to 8%, see the 'VoIP Security' chapter of [Avaya IP Office™ Platform Security Guidelines](#).

In addition to the network requirements for VoIP calls, additional bandwidth should be reserved for the corresponding inter-node signaling and management paths. This should include any access via SSLVPN (IPOSS) or Remote Support Service (RSS). The following suggested minimum bandwidths should be made available for these additional paths:

| Traffic | Suggested Minimum Bandwidth | Comments |
|--|---|--|
| Inter-node Signaling/ Status | 256 kbit/s | Between Primary and each Expansion Between Primary and Secondary Between Secondary and each Expansion. Limited signaling/status directly between Expansions Bursty traffic, peaking after start-up or restoration of node to node connectivity. |
| one-X Portal CTI | 96 kbit per call (or 192 kbit/s @ 7,200 BHCC) | Between one-X Portal server location and Expansion when one-X Portal server active. |
| Web Management | 512 kbit/s | Between Web Manager PC and Primary (or Secondary under failover conditions) when a Web Management session is active |
| IP Office Server Edition Manager | 512 kbit/s | Between SE Manager PC and each node when a IP Office Server Edition Manager session is active |
| Upgrade | 512 kbit/s | Between Primary and each node when upgrade is being performed |
| Backup/Restore | 256 – 2048 kbit/s | Between Backup Server and each Expansion Between Backup Server and Primary Between Backup Server and Secondary An IP Office Linux platform can be designated as the backup server. Bandwidth is only required when a backup or restore operation is active, and only between participating nodes. The bandwidth required depends on the backup/restore content. |
| Voicemail Pro client | 512 kbit/s | Between Voicemail Pro PC and Primary (or Secondary under failover conditions) when a Voicemail Pro server management session is active |
| Voicemail Pro Server <> Voicemail Pro Server | 1024 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| | 32 kbit/s per active channel | Extra traffic between Secondary and Primary when Dual Voicemail Pro active |
| Voicemail Pro Server <> IP Office Media Manager | 32 kbit/s per active channel | Bursty SFTP traffic, between Primary and external server running IP Office Media Manager. Typically IP Office Media Manager runs coresident with Voicemail Pro. For dual active Voicemail Pro, the Secondary Voicemail Pro will send all recordings to the server running IP Office Media Manager. |

Table continues...

| Traffic | Suggested Minimum Bandwidth | Comments |
|---|--|---|
| Web Collaboration Client | 128 – 256 kbit/s | Between each active Web Collaboration client and the Web Collaboration server |
| WebRTC Client | 6 – 256 kbit/s | Between each active Avaya Communicator for Web client and the WebRTC Gateway |
| one-X Server <> one-X Server | 1–500 users: 512 kbit/s 500–1500 users: 1024 kbit/s 1500–3000 users: 2048 kbit/s | Bursty traffic, peaking after start-up or restoration of Server to Server connectivity |
| SoftConsole | 64–1024 kbit/s | Bursty traffic, peaking after start-up. Higher figure for maximum 3000 user deployment. Between each SoftConsole application and the IP Office server. |
| SMDR | 1 kbit per call report (or 7.2 kbit/s @ 7,200 BHCC) | Average SMDR message size for typical call pattern |
| RSS to co-located server | 64 –1024 kbit/s per TCP Tunnel | Between remote client and col-located server when a remote management session is active |

- These figures are for general guidance only as they do not reflect the specific requirements for a given installation. For example management operations are typically session based; backup/restore content and frequency are administerable; many are bursty in nature and may or may not coincide with others.
- Only the major signaling and management paths are included here, further network bandwidth may be required for SSA, SysMonitor, syslog, SNMP, etc.
- An IP Office port matrix document that covers all possible IP communications should also be consulted. It is available via the Avaya Support site (<https://support.avaya.com>).
- Server internal communications do not require bandwidth assessment

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

IP Office SoftConsole

IP Office SoftConsole is an operator/receptionist application that can be assigned to particular extension users.

| Platform | | Maximum SoftConsole Users | | Monitor Max. Hunt Groups / Users |
|-----------------------------------|--------------------------|---------------------------|----------|----------------------------------|
| | | Server | Solution | |
| Standard/IP Office Server Edition | Linux/OVA ^[1] | 10 | 32 | 20 |
| | IP500 V2/V2A | 4 | 32 | 10 |
| IP Office Select | Linux/OVA ^[1] | 10 | 75 | 40 |
| IP Office Subscription | IP500 V2/V2A | 4 | 75 | 10 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- The number of supported IP Office SoftConsole users depends on licensing/subscriptions:
 - For IP Office Subscription mode systems, the maximums and the number of subscriptions control the number of users who can be configured as IP Office SoftConsole users.
 - For other modes, the maximums and the number of licenses control the number of simultaneous active IP Office SoftConsole users
 - Monitor Max. Hunt Groups /Users - The maximum active IP Office SoftConsole applications that can be used to monitor the same hunt group or user.
 - IP Office Manager does not permit more than 32 IP Office SoftConsole users if the solution is not IP Office Select or IP Office Subscription.

Related links

[General Capacity Considerations](#) on page 57

Multi-Site Network Link Capacities

A multi-site network link is the IP Office Line connection between each server (node). The links are arranged in a star topology with the Primary Server at the center, or double star when a Secondary is present.

Regardless of direct/indirect media, VCM or codec used, a further capacity consideration is the multi-site network links between all nodes. Each IP500 V2 or Linux link has a maximum capacity of 250 channels/calls (500 for IP Office Select Linux servers). The maximum total and outgoing channels are independently configurable in Manager via the **IP Office Line > VoIP Line** tab, and have a default of 128 for both.

This is per link, not a per system limit; for example a Primary or Secondary may have up to 250/500 concurrent calls to each Expansion system. Due to the star topology of IP Office Server Edition, calls between Expansion systems typically go via the Primary or Secondary and therefore these calls must also be taken into account when considering Multi-site network link capacity.

For IP Office Select/IP Office Subscription, it is possible to add IP Office lines between expansion Systems. There is a limit of one link between each pair of expansions. This link can be used

to increase capacity or resilience. Calls between Expansions will go direct rather than via the Primary/Secondary.

It is not possible to add additional multi-site network links between the Primary/Secondary and Expansions – if the capacity is exhausted an additional Secondary or Expansion system should be considered.

The following occurs if the maximum numbers are exceeded:

- If the configured values are exceeded, additional outgoing calls can be routed via ARS configuration providing an alternative route exists; additional incoming calls are automatically routed, again providing an alternative route exists.
- Alternative routes only exist when a Secondary Server is present.
- If no alternative route, incoming calls remain ringing until a channel is free, outgoing calls indicate busy.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Paging

The paging function is limited by the number of extensions present in the paging group, and the platform type.

| System Mode | Platform | Maximum Paging Group Size |
|--------------------------|--------------------|---------------------------|
| IP Office Server Edition | Dell R240 | 128 |
| | HP DL 360 | 128 |
| | Dell R640 | 512 |
| | OVA ^[1] | 512 |
| IP Office Select | Dell R640 | 512 |
| IP Office Subscription | OVA ^[1] | 512 |
| All | IP500 V2/V2A | 64 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- Paging groups that include any user on a IP500 V2/V2A Expansion are limited to 64.
- Paging groups with SRTP endpoints reduces the maximum size pro-rata up to 50%.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.

- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Remote Support Services

Remote Support Services (RSS) is a TCP tunneling mechanism supported by IP Office Subscription, used for both internal IP Office and co-located server management interfaces.

The following RSS capacities are supported:

| Platform | Total RSS bandwidth Mbit/s | Maximum TCP Tunnels | Notes |
|--------------------|----------------------------|---------------------|---|
| Dell R240 | 10 | 64 | - |
| HP DL360 | 10 | 64 | - |
| Dell R640 | 20 | 64 | Assumes sufficient VM resources assigned. |
| OVA ^[1] | 20 | 64 | - |
| IP500 V2 | 1 | 64 | - |

Notes

- No bandwidth limits are enforced
- RSS traffic flows between the Primary and Secondary or Expansion using the IP Office line
- The RSS bandwidth of the Primary also determines the total Server Edition deployment bandwidth

The following occurs if these figures are exceeded:

- If total bandwidth is exceeded, general IP Office processing capacity and performance will reduce. High overload conditions will cause the IP Office to perform poorly in general.

Related links

[General Capacity Considerations](#) on page 57

Resilience and Failover

Resilience is supported in Linux-based networks. However, the use of resilience requires consideration of various capacity issues:

- The total extensions/users on any single Primary, Secondary or Expansion must not be configured to exceed their supported limits under any circumstances.
- Primary failure when Secondary present will route all non-local Expansion calls, Voicemail leave and collect, IVR and Auto Attendants to the Secondary

- Primary failure when Secondary present will move Hunt group processing and management access to the Secondary. This will increase the management bandwidth from the Secondary to the Expansion systems.
- Users whose extension or application fails over retain their existing user profiles rights without needing or consuming an licenses on the fallback server.
- Any voicemail channel entitlements associated with the Primary, move to the Secondary on failover; no separate license provision on the fallback server is required – unless the dual active Voicemail Pro feature is enabled.

For further information, refer to the [IP Office Resilience Overview](#) manual.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

Unified Messaging Capacity

Voicemail Pro provides a number of integration options for Unified Messaging (UMS):

| System Mode | Platform | Native/ IMAP/ SMTP | Exchange Integration | | Gmail Integration | |
|--|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| | | | via EWS | via MAPI | Copy/ Alert | Forward |
| IP Office Server Edition | Dell R240 | 750 | 750 | 490 | 750 | 250 |
| | HP DL360G7 | 1500 | 1500 | 490 | 1500 | 250 |
| | Dell R640 | 2000 | 2000 | 490 | 2000 | 250 |
| | OVA ^[1] | 2000 | 2000 | 490 | 2000 | 250 |
| IP Office Select IP Office Subscription | Dell R640 | 3000 | 3000 | 490 | 3000 | 250 |
| | OVA ^[1] | 3000 | 3000 | 490 | 3000 | 250 |
| IP500 V2 | UCM V2 | 384 (200) ^[2] | 384 (200) ^[2] | 384 (200) ^[2] | 384 (200) ^[2] | 384 (200) ^[2] |

! Important:

- Due to changes in the Gmail API, support for Gmail Integration has been withdrawn. Support will be re-enabled in a future release.
1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
 2. Capacity when one-X Portal is running on the module.
 3. Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.

4. Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.
- Use of these options requires the user or hunt group to be licensed, either using an appropriate IP Office user profile license or the legacy UMS Web Services license.
 - Each voicemail server in a dual active Voicemail Pro deployment supports independent UMS integration capacity.
 - When resilience active, UMS integrations are supported at the same per-server capacity.
 - The MAPI exchange integration supports 245 users per MAPI proxy service running on the Exchange Server.
 - A maximum of two MAPI proxy services can be running, giving a total of 490 mailboxes.
 - Hunt Groups cannot support Gmail integration.
 - The Gmail maximum message length is 14 minutes.

Related links

[General Capacity Considerations](#) on page 57

Voicemail or Auto-Attendant or IVR

Leaving a Voicemail for a user or hunt group will use one licensed (and available) voicemail channel and consume one from the indirect media call capacity of the Voicemail Pro server (Primary or Secondary).

If the endpoint is remote, an IP Office Line (SCN trunk) channel is used. If the source of the call is digital/analog, a VCM channel is also required.

A voicemail collect operation uses the same resources as voicemail leave. Invoking an Auto Attendant, Announcement or IVR script uses the same resources as voicemail, and is taken from the same pool of licenses and voicemail channel capacity; one active Auto Attendants/IVR/Announcement takes one channel and license.

The total solution voicemail channel capacity is determined by a number of factors:

- The number of per-server supported voicemail channels:

| Server | Maximum Voicemail Channels |
|---------------------|---|
| Dell R640/OVA | 250 |
| HP DL360 | 150 |
| Dell R230 | 75 |
| IP500 V2/V2A UCM V2 | 40 (20 when Avaya one-X® Portal is running on the module) |

- If dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) – this doubles the maximum capacity to 500 channels.
- The number of licensed voicemail channels: Each active master Voicemail Pro must have its own licenses. It inherits the other set when active as a backup.

- Call recording also uses licensed voicemail channels. One active recording channel consumes one voicemail/AA channel.

Dual Voicemail Server Operation

When the dual Voicemail Pro feature is active (IP Office Select and IP Office Subscription only) and not under failover conditions, users are provided voicemail services (voicemail, announcements, call recording, auto attendant, IVR, etc) services from one of the Voicemail Pro servers:

- All Primary users' voicemail invocations are directed to the Primary Voicemail Pro instance.
- All Secondary users' voicemail invocations are directed to the Secondary Voicemail Pro instance.
- All Expansion users' voicemail invocations are directed to the Voicemail Pro instance defined by the **System > Voicemail > Voicemail Destination** setting. This is initially selected by the Initial Configuration Utility (ICU).

Administration

To ensure Voicemail Pro channel capacity is available for voicemail, call flow and announcement operations, the IP Office Server Edition Manager settings Voicemail Channel Reservation on the Primary and **Secondary Server's System > Voicemail** tab can be configured to reserve channels exclusively for specific uses.

Mailbox capacity

The Voicemail Pro automatically creates a mailbox for each user and hunt group in the IP Office configuration. The individual capacity is fixed at 60 minutes per user or group mailbox.

If voicemail channel resources run out:

- Unanswered calls continue to alert rather than going to voicemail.
- Voicemail collect fails to connect to the voicemail.
- Calls to attendants and call-flows will continue to alert. However, text-to-speech (TTS) will not be output during call flows.
- Announcements are not played.
- Note that the TTS channel capacity is 250.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

What happens if mailbox storage resources run out?

- Voicemail leave operations will receive an announcement that the user/group's mailbox is full.
- Voicemail collect will continue to function.

Related links

[Primary and Secondary Server Capacity](#) on page 14

[IP500 V2/V2A Servers](#) on page 35

[General Capacity Considerations](#) on page 57

WebRTC Gateway

The following WebRTC client capacity is supported with two main options aligned to the Avaya one-X® Portal Server:

- WebRTC Gateway running on the Primary Server
- Standalone server with increased capacity (IP Office Application Server with just Avaya one-X® Portal)

| System Mode | Platform | Max. Sessions | | Max. Clients | | Max. Call Rate (BHCC) |
|--|--------------------|---------------|-------------|--------------|-------------|-----------------------|
| | | Primary | Stand Alone | Primary | Stand Alone | |
| IP Office Server Edition | Dell R240 | 64 | 128 | 375 | 7200 | 7200 |
| | HP DL360G7 | 128 | 256 | 750 | 9000 | 9000 |
| | Dell R640 | 512 | 1024 | 1024 | 9000 | 9000 |
| | OVA ^[1] | 512 | 1024 | 1024 | 10000 | 10000 |
| IP Office Select IP Office Subscription | Dell R640 | 512 | 1024 | 1024 | 10000 | 10000 |
| | OVA ^[1] | 512 | 1024 | 1024 | 10000 | 10000 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).

- The quoted Busy Hour Call Completion (BHCC) rates assumes a Normal call distribution.
- The WebRTC server application must run co-resident with the Avaya one-X® Portal server.
- The maximum WebRTC sessions figures are the maximum number of WebRTC Gateway client sessions.
- If video used, capacity is reduced by 2 for each session.
- Each WebRTC session results in a SIP session with indirect media between the WebRTC Gateway and the user's IP Office.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Web Collaboration

The following Web Collaboration client capacity is supported with two main options aligned to the Avaya one-X® Portal Server:

- Web Collaboration server running on the Primary
- Standalone server with increased capacity (IP Office Application Server running just one-X Portal)

| Server Type | Maximum Web Collaboration Sessions | | Maximum Document Storage |
|-------------|------------------------------------|---------------|--------------------------|
| | Primary | Standalone | |
| Dell R240 | 16x3 > 1x48 | 42x3 > 2x64 | 10 documents per user |
| HP DL360G7 | 21x3 > 1x64 | 85x3 > 2x128 | |
| Dell R640 | 42x3 > 2x64 | 170x3 > 2x256 | |
| OVA | 42x3 > 2x64 | 170x3 > 2x256 | |

- The Web Collaboration server application must run co-resident with the one-X Portal server.
- Maximum document storage assumes an average 6MB per document and 10% of users are Web Collaboration enabled.
- Any corresponding audio conference is entirely separate from the Web Collaboration session.
- OVA always advertises these figures. However, capacity depends on assigned profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

If document storage resources run out?

If document storage resources run out, further attempts to upload documents are rejected. Previous uploaded documents need to be deleted to release space.

Related links

[General Capacity Considerations](#) on page 57

WebLM Server

The WebLM server application that is co-resident on the Primary and Application Server is primarily intended for use by IP Office components, but can be used for other Avaya license clients such as ACCS providing the following capacities are not exceeded:

| Platform | Maximum License files | Maximum WebLM clients | Maximum client requests |
|--------------------|-----------------------|-----------------------|-------------------------|
| Dell R240 | 150 | 300 | 6000 |
| HP DL360 | 300 | 600 | 12500 |
| Dell R640 | 300 | 600 | 12500 |
| OVA ^[1] | 300 | 600 | 12500 |

1. Assumes virtual machine profiling as detailed in ["Deploying IP Office Servers as Virtual Machines"](#).


- One license type from one client constitutes one client request. For example: one Expansion System requesting 6 different license types (say Edition, SIP trunk channels, IP Endpoint, SoftConsole, Power User, Basic User) will result in 6 client requests.
- Unless otherwise stated, Avaya-supplied HP DL120, Dell R210/R220/R230/R240 servers are equivalent.
- Unless otherwise stated, Avaya-supplied Dell R620/R630/R640 servers are equivalent.

Related links

[General Capacity Considerations](#) on page 57

Chapter 9: Capacity Planning Beyond 3000 Users

To provide a cost effective solution of more than 3000 users or 150 sites to larger customers, two IP Office Select systems may be linked together to support a total of 6000 users/extensions:

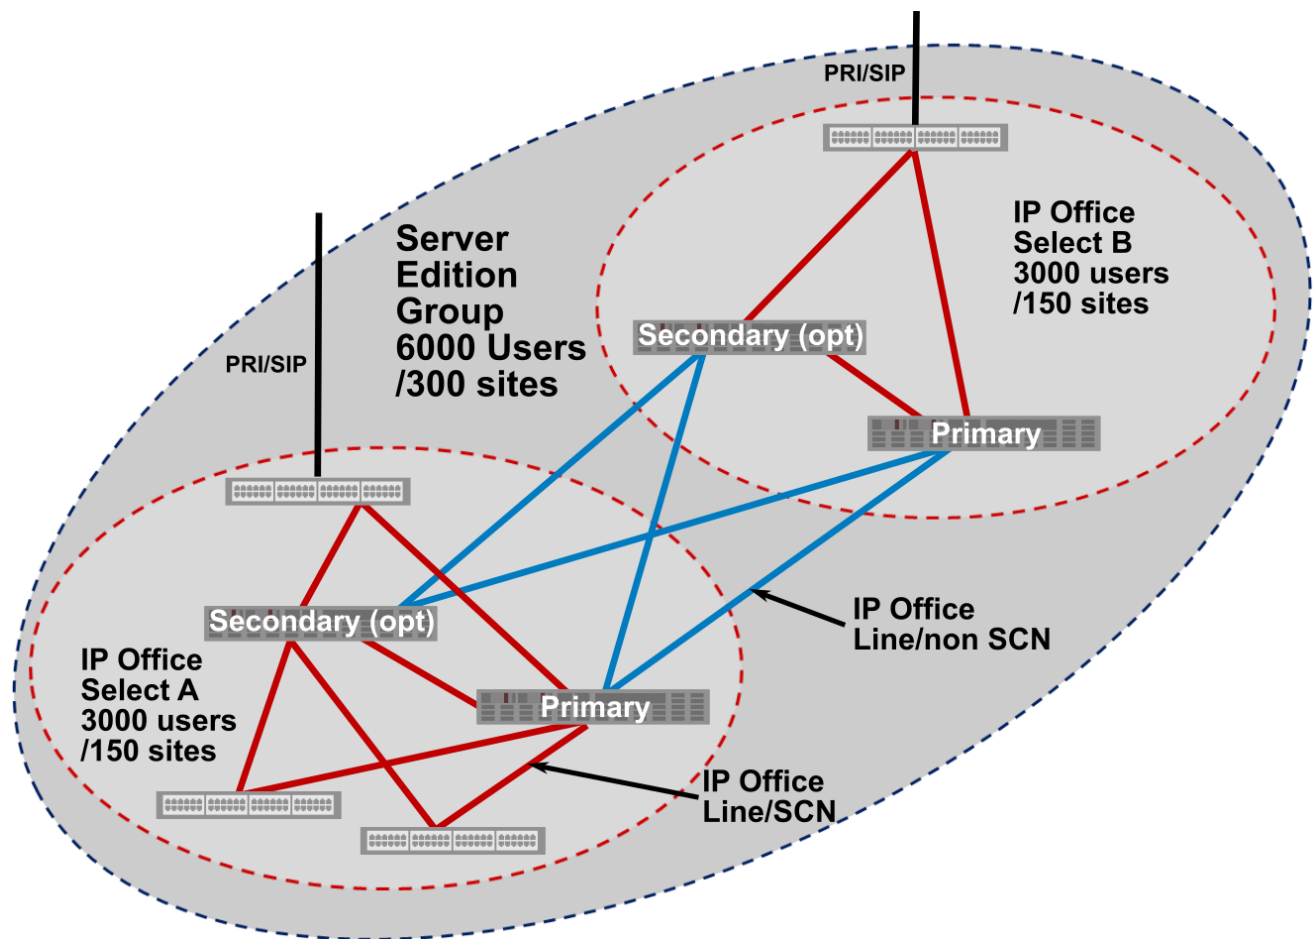

This construct may also be used when other per-solution capacities are exceeded, for example Avaya one-X® Portal users, hunt groups or Voicemail/recording channels.

You can create a group by linking two separate IP Office Select systems via IP Office lines to provide a single system view to users.

Each IP Office Server Edition system has its own Primary and Applications, and optional Secondary Server and Expansion Systems; each IP Office Server Edition system needs to be managed separately. The systems are set up through configuration to share a common dial plan and directory.

| Feature | IP Office Select | Grouped SE | Comment |
|--|--|--|--|
| Maximum Users/ Extensions | 3000 | 6000 | 3000 per system |
| Directory | Single Directory | Common directory with manual synchronization between the two systems | Can use auto synchronization for system directory |
| Directory Size | 10000 | 10000 | – |
| Dial Plan | Single dial plan | Single dial plan | For example, 21xxxx is on A and 22xxxx is on B |
| Trunk Sharing across nodes | Yes | Yes | Requires additional ARS and ICR setup |
| Dial by name | Yes | Yes | Requires common directory |
| Hold/Transfer | Yes | Yes | – |
| Internal dialing and calling user name | Yes | Yes | – |
| Direct Media | Yes | Yes | – |
| Busy and Presence Indicators | System Wide | Limited to local SE | – |
| Hot Desking | System Wide | Limited to local SE | Partial resolution with multiple accounts |
| Hunt Groups | Fully Networked | Partially Networked | Hunt groups are limited to one SE system but can be linked between systems |
| Music On Hold | 4 per node, either local or from Primary | 4 per node, either local or from local Primary | Cannot stream MOH from other Primary |
| SMDR | Single stream per node | Single stream per node | – |
| Voicemail | Single/Dual | Single/Dual VM per SE | – |
| Avaya one-X® Portal | Single | Single one-X server per SE | – |
| SCN telephony features | System Wide | Limited to local SE | – |

Related links

[Inter Server Edition Link](#) on page 85

[Directory](#) on page 85

[Dial plan](#) on page 86

[Outgoing Call routing](#) on page 86

[Hunt Groups](#) on page 86

[Administration](#) on page 87

[Versions or Upgrades](#) on page 87

Inter Server Edition Link

The links between the two IP Office Server Edition systems are achieved using IP Office Lines with the following settings:

- Transport Type: WebSocket Client/Server
- Security: Medium or High
- Networking Level: None
- Allow Direct Media Path: Active
- Out Of Band DTMF: Active

One trunk should be added between each Primary and each Secondary. This allows calls from one system to appear as though internally dialled on the other. The WebSocket Server end for all lines should be the same IP Office Select system.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Directory

To enable users of one system to be visible in the directory of the other, each Primary's directory configuration requires a copy of the other's:

- Export each node's users as CSV using IP Office Server Edition Manager.
- Extract Full Name and Extension fields from each file into a single CSV directory file. See 'Importing and Exporting Settings' in the "*Deploying Avaya IP Office Platform IP500 V2*" manual for more information on the file formats.
- Hunt groups or common system directory entries can also be added to the directory file at this time if required.
- Import the resultant CSV directory file into the other Primary (only) using IP Office Server Edition Manager.
- Ensure the total central directory on each SE does not exceed 10,000 entries. See [Directory](#) on page 69.

The centralised system directory mechanism will distribute to all other nodes.

If an external LDAP directory is also used, one Primary can be configured with the LDAP source, and the other using the first as the HTTP source.

For more information on directory options and capacities see 'Directory & Call Log' and 'Centralized System Directory' in "*Administering Avaya IP Office Platform with Manager*".

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Dial plan

Each user and hunt group of the cluster must have a unique name and number.

Branch prefix should not be used as this will conflict with the internal routing.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Outgoing Call routing

The default outgoing call routing provides a fall-back ARS on every Expansion to Primary then Secondary. When creating a cluster it is recommended that a further fall-back ARS is added between each Primary and each Secondary.

PSTN/SIP trunks on one system can be accessed from the other using ARS and/or dial short codes, along with additional Incoming Call Routes.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Hunt Groups

Each IP Office Server Edition System has separate hunt groups. It is not possible to configure hunt groups with members of both systems. It is possible to support limited overflow between systems by the use of an overflow group with local users that have hunt group call forwarding enabled to a remote user. This is only supported on rotary and sequential ring types and must not be used to link hunt groups.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Administration

Each IP Office Server Edition System is managed as a separate entity although both solutions can be managed from the same workstation if required.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Versions or Upgrades

Both IP Office Select systems should be the same software version. Each should be upgraded separately from their respective Primary Server.

Related links

[Capacity Planning Beyond 3000 Users](#) on page 83

Chapter 10: Additional Help and Documentation

The following pages provide sources for additional help.

Related links

[Additional Manuals and User Guides](#) on page 88

[Getting Help](#) on page 88

[Finding an Avaya Business Partner](#) on page 89

[Additional IP Office resources](#) on page 89

[Training](#) on page 90

Additional Manuals and User Guides

The [Avaya Documentation Center](#) website contains user guides and manuals for Avaya products including IP Office.

- For a listing of the current IP Office manuals and user guides, look at the [Avaya IP Office™ Platform Manuals and User Guides](#) document.
- The [Avaya IP Office Knowledgebase](#) and [Avaya Support](#) websites also provide access to the IP Office technical manuals and users guides.
 - Note that where possible these sites redirect users to the version of the document hosted by the [Avaya Documentation Center](#).

For other types of documents and other resources, visit the various Avaya websites (see [Additional IP Office resources](#) on page 89).

Related links

[Additional Help and Documentation](#) on page 88

Getting Help

Avaya sells IP Office through accredited business partners. Those business partners provide direct support to their customers and can escalate issues to Avaya when necessary.

If your IP Office system currently does not have an Avaya business partner providing support and maintenance for it, you can use the Avaya Partner Locator tool to find a business partner. See [Finding an Avaya Business Partner](#) on page 89.

Related links

[Additional Help and Documentation](#) on page 88

Finding an Avaya Business Partner

If your IP Office system currently does not have an Avaya business partner providing support and maintenance for it, you can use the Avaya Partner Locator tool to find a business partner.

Procedure

1. Using a browser, go to the [Avaya Website](#) at <https://www.avaya.com>
2. Select **Partners** and then **Find a Partner**.
3. Enter your location information.
4. For IP Office business partners, using the **Filter**, select **Small/Medium Business**.

Related links

[Additional Help and Documentation](#) on page 88

Additional IP Office resources

In addition to the documentation website (see [Additional Manuals and User Guides](#) on page 88), there are a range of website that provide information about Avaya products and services including IP Office.

- [Avaya Website](#) (<https://www.avaya.com>)

This is the official Avaya website. The front page also provides access to individual Avaya websites for different regions and countries.

- [Avaya Sales & Partner Portal](#) (<https://sales.avaya.com>)

This is the official website for all Avaya business partners. The site requires registration for a user name and password. Once accessed, you can customize the portal to show specific products and information type that you want to see.

- [Avaya IP Office Knowledgebase](#) (<https://ipofficekb.avaya.com>)

This site provides access to an online, regularly updated version of IP Office user guides and technical manual.

- [Avaya Support](#) (<https://support.avaya.com>)

This site provide access to Avaya product software, documentation and other services for Avaya product installers and maintainers.

- **Avaya Support Forums** (<https://support.avaya.com/forums/index.php>)

This site provides forums for discussing product issues.

- **International Avaya User Group** (<https://www.iuag.org>)

This is the organization for Avaya customers. It provides discussion groups and forums.

- **Avaya DevConnect** (<https://www.devconnectprogram.com/>)

This site provides details on APIs and SDKs for Avaya products, including IP Office. The site also provides application notes for third-party non-Avaya products that interoperate with IP Office using those APIs and SDKs.

- **Avaya Learning** (<https://www.avaya-learning.com/>)

This site provides access to training courses and accreditation programs for Avaya products.

Related links

[Additional Help and Documentation](#) on page 88

Training

Avaya training and credentials ensure our Business Partners have the capabilities and skills to successfully sell, implement, and support Avaya solutions and exceed customer expectations. The following credentials are available:

- Avaya Certified Sales Specialist (APSS)
- Avaya Implementation Professional Specialist (AIPS)
- Avaya Certified Support Specialist (ACSS)

Credential maps are available on the [Avaya Learning](#) website.

Related links

[Additional Help and Documentation](#) on page 88

Index

A

| | |
|-----------------------------------|--|
| account codes | 58 |
| administration | 87 |
| Administrator | 88 |
| APIs | 89 |
| applicability | 8 |
| Application Notes | 89 |
| audio conferencing | 14 , 35 , 58 |
| auto-attendant | 31 , 53 , 78 |
| avaya | |
| contact center applications | 12 |

B

| | |
|--------------------------------|--|
| bandwidth | 26 , 45 , 71 |
| Base Stations | 68 |
| beyond | |
| users | 83 |
| business partner locator | 89 |
| button | |
| appearance buttons | 61 |
| modules | 60 |

C

| | |
|------------------------|--|
| call | |
| history | 62 |
| logs | 62 |
| media path | 19 |
| routing | 86 |
| traffic profile | 21 , 42 , 66 |
| call capacity | 16 |
| call destination | 18 , 39 , 61 |
| call media path | 39 |
| call recording | 19 , 40 , 63 |
| capacity | |
| messaging | 77 |
| planning | 13 , 83 |
| Capacity | 65 |
| Changes | 10 |
| channel | |
| VCM | 51 |
| concurrent | |
| call capacity | 37 |
| contacts | 69 |
| courses | 89 |
| CTI | |
| TAPI | 67 |

D

| | |
|-------------------|---|
| DECT | 68 |
| definitions | 10 |
| dial | |
| plan | 86 |
| directory | 69 , 85 |
| disclaimer | 7 |

E

| | |
|------------------|---|
| edition | |
| link | 85 |
| expansion | |
| server | 56 |
| extensions | 23 , 44 |

F

| | |
|--------------|--------------------|
| forums | 89 |
|--------------|--------------------|

H

| | |
|------------------|--|
| Help | 88 |
| hunt | |
| group | 86 |
| hunt group | 25 , 44 , 69 |

I

| | |
|-----------------------------|--|
| incoming | |
| call routes | 70 |
| information | |
| classifications | 8 |
| intended audience | 7 |
| inter | |
| server | 85 |
| IP infrastructure | 26 , 45 , 71 |
| IP office SoftConsole | 73 |
| IP500 V2/V2A servers | 35 |
| IVR | 31 , 53 , 78 |

L

| | |
|---------------------------|--------------------|
| linux | |
| expansion | 56 |
| Linux-based network | 10 |

M

| | |
|---------------|--|
| mailbox | 31 , 53 , 78 |
|---------------|--|

| | | | |
|-------------------------------|--|-------------------------|--|
| Manuals | 88 | trunk capacity | 29 |
| maximum | | | |
| trunk capacity | 49 | | |
| multi-site network | | | |
| link capacities | 28 , 48 , 74 | | |
| N | | U | |
| NDA requirements | 8 | unified | |
| | | capacity | 77 |
| | | user directory | 69 |
| | | User Guides | 88 |
| | | users | 23 , 44 |
| O | | V | |
| one-X portal | | VCM | |
| server | 33 | channel | 51 |
| outgoing | | versions | |
| call | 86 | upgrades | 87 |
| overview | 9 | virtualized | |
| | | deployments | 10 |
| | | voicemail | 31 , 53 , 78 |
| | | VoIP QoS | 26 , 45 , 71 |
| P | | W | |
| paging | 75 | web collaboration | 81 |
| personal directory | 69 | WebLM | |
| presence group | 25 , 44 , 69 | server | 81 |
| Primary | 14 | WebRTC | |
| purpose | 7 | gateway | 80 |
| | | websites | 89 |
| Q | | | |
| Quick Reference Guides | 88 | | |
| R | | | |
| Recording size | 65 | | |
| Remote Support Services | 76 | | |
| Reseller | 88 | | |
| resilience | | | |
| failover | 29 , 48 , 76 | | |
| RSS | 76 | | |
| S | | | |
| sales | 89 | | |
| SCN | 49 | | |
| SDKs | 89 | | |
| Secondary | 14 | | |
| Small Community Network | 49 | | |
| subscription | 12 | | |
| support | 89 | | |
| System Administrator | 88 | | |
| system directory | 69 | | |
| T | | | |
| Technical Bulletins | 89 | | |
| training | 89 , 90 | | |